


Space-Mounted Thermostats and Controls

<p>CODE 80 - 1-stage, 50-90° F, 24V, Honeywell T812C1000 Heating/Cooling Thermostat, P/N 255350 (Same as Option CL1)</p>		<p>CODE 81 - Electronic Two-Stage non-programmable Thermostat, M/H TH5220D1159, 40-90°F, 24V, 2-stage heating/2-stage cooling, P/N 220630 (Same as Option CL22)</p>	
<p>CODE 82 - Electronic Two-Stage, 7-day Programmable Thermostat, Touch screen, M/H TB8220U1003, 2-stg heating/2-stg cooling, P/N 257338 (Same as Option CL23)</p>		<p>CODE 83 - 5-2 Programmable Thermostat, 45-88°F, M/H TH411D1007, 24 volt, heating/cooling, P/N 220632 (Same as Option CL52)</p>	
<p>CODE 84 - Electronic 7-day Programmable, 2-stage heating/2-stage cooling, 24v, switching subbase with auto/cool/off/heat switch and auto/on fan switch, Honeywell #T7350D1008, P/N 221038 (Same as Option CL33)</p>		<p>CODE 85 - Locking Thermostat Cover P/N 257464, Height 6-1/2" (165mm), Width 7-1/2" (191mm), Depth 2-15/16" (75mm) - fits thermostats in CODES 80-83 (Same as Option CM1) P/N 257463, Height 7-1/4" (184mm), Width 9-3/4" (248mm), Depth 3-3/8" (86mm) - fits thermostat CODES 80-84 (Same as Opt CM1B)</p>	
<p>CODE 86 - Room Command Module Sensing Space Temperature, P/N 211423, part of Digital Control Options DG1 and DG2</p>		<p>CODE 87 - Room Command Module Sensing Discharge Temperature, P/N 211424, part of Digital Control Options DG5 and DG6</p>	<p>CODE 88 - Room Override 1-stage Thermostat, P/N 220631, optional part of Digital Control Options DG5 and DG6, same as Option CL56</p> 
<p>CODE 89 - Wall-mounted Space Temperature Sensor, Option CL67, used with D12 B, C, D, E, F, G -- Part is no longer available; order replacement P/N 260599. This is not a direct replacement; contact your factory representative or the factory Service Department for wiring instructions.</p>	<p>CODE 90 - Optional Remote User Interface, P/N 223125, same as Option RB2A for use w/ Digital Control Options D12 B, C, D, E, F, G</p> 		
<p>CODE 91 - Outside Air Relative Humidity Transmitter, P/N 206081 (included with all D12 control options)</p>	<p>CODE 92 - Wall-Mounted Dehumidistat, P/N 177231, same as Option CL47 (used with cooling coil with reheat Option AU7)</p> 		

Remote Consoles

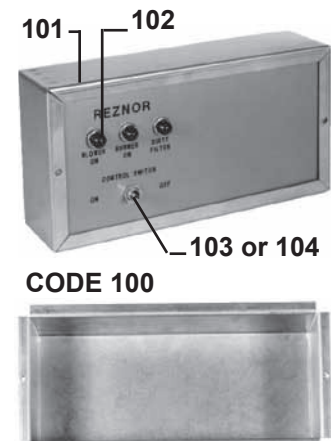

Optional RC style remote console includes a mounting ring so that the console may be either recessed or wall mounted. The box is of 16 gauge steel with knockout holes for field wiring. The cover is made of plastic with custom engraving. Order replacement parts for Option RC remote console by part number.

CODE	Description	P/N	Console Option Dimensions			
100	Console Box - 10-1/16 x 6-5/8 x 2-5/8	107010	(approximate dimensions with mounting ring*)			
	Console Box - 15-1/16 x 6-5/8 x 2-5/8	107011				
101	Mounting Ring for 10-1/16" lg box	107014	Console Options	Length	Height	Depth
	Mounting Ring for 15-1/16" lg box	107015				
102	Red Light, Solico 3039-3-11-41610	101889	All RC 1, 2, 3, 4, 5, 6, 9	10-3/4"	7-5/8"	2-5/8"
103	SPDT Switch, Cutler Hammer #7505K6, 15 amps	101901	RC 7, 8, 10, 12 without an optional control on the console	10-3/4"	7-5/8"	2-5/8"
104	DPDT Switch, Cutler Hammer #7561K6, 15 amps	101900	RC 7, 8, 10, 12 with an optional control on the console	15-3/4"	7-5/8"	2-5/8"
81 (pg 11)	1-Stage Heating Thermostat	255350	All RC 11	15-3/4"	7-5/8"	2-5/8"
84 (pg 11)	1 or 2-Stage Heating/Cooling Thermostat	220630				
234 (pg 28)	Potentiometer	16110				

* Subtract 5/8" from L & H when recessing console (not using wall-mounting ring)