


IDV Technology

Intermediate Discharge Valves (IDVs) are mechanical valves that improve the part-load efficiency of air conditioning systems.

The new Danfoss scroll range with IDVs is backward compatible with existing Danfoss scrolls to reduce complexity and save time during installation.

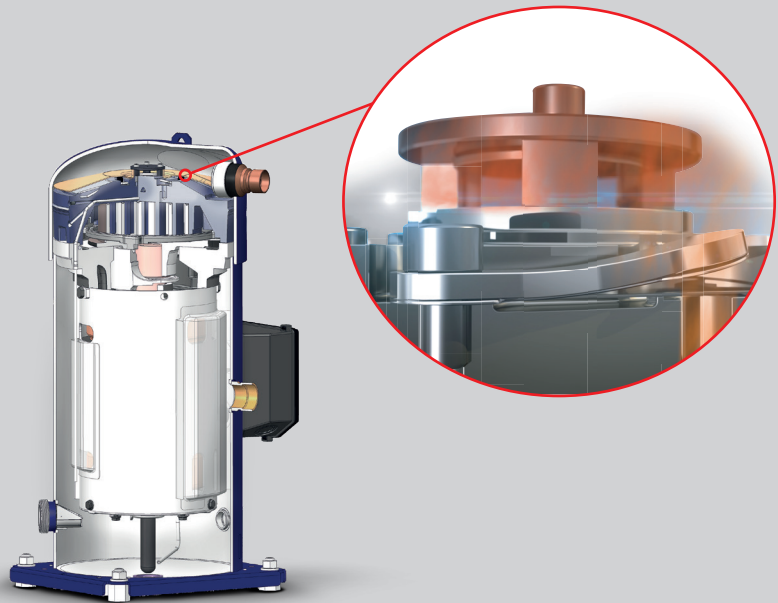

Product Selection

Refrigerant	Nominal tonnage	Voltage/phase/frequency	Competitor model no. ¹		Motor protection	Net weight (lbs.)	Solder ODF connection (in.)	Solder sleeve adaptor set to Rotolock connections	OLD Danfoss Model No.	OLD Danfoss Code No. ²	NEW Danfoss Model No.	NEW Danfoss Code No. ²
R410A	7½	200–230/3/60	CSHD-089J CSHD-092J	ZP90KCE-TF5 ZP91KCE-TF5	Internal Overload Protector	128	1½ × ¾	120Z0125	SH090A3AL*	120H0001	DSH090A3ALA	120H1180
		460/3/60	CSHD-089K CSHD-092K	ZP90KCE-TFD					SH090A4AL*	120H0003	DSH090A4ALB	120H1182
	8¾	200–230/3/60	CSHD-105J	ZP103KCE-TF5		141			SH105A3AL*	120H0209	DSH105A3ALA	120H1188
		460/3/60	CSHD-105K	ZP103KCE-TFD					SH105A4AL*	120H0211	DSH105A4ALB	120H1190
	10	200–230/3/60	CSHD-125J	ZP120KCE-TF5		148	1¾ × ¾	120Z0405	SH120A3AL*	120H0011	DSH120A3ALA	120H1196
		460/3/60	CSHD-125K	ZP120KCE-TFD					SH120A4AL*	120H0013	DSH120A4ALB	120H1198
	11½	200–230/3/60	CSHD-142J	ZP137KCE-TF5		152			SH140A3AL*	120H0199	DSH140A3ALA	120H1204
		460/3/60	CSHD-142K	ZP137KCE-TFD					SH140A4AL*	120H0201	DSH140A4ALB	120H1206
	13½	200–230/3/60	CSHD-161J	ZP154KCE-TF5		158			SH161A3AL*	120H0021	DSH161A3ALA	120H1212
		460/3/60	CSHD-161K	ZP154KCE-TFD					SH161A4AL*	120H0023	DSH161A4ALB	120H1214
	15	200–230/3/60	CSHD-183J	ZP182KCE-TF5					SH184A3AL*	120H0359	DSH184A3ALA	120H1220
		460/3/60	CSHD-183K	ZP182KCE-TFD					SH184A4AL*	120H0361	DSH184A4ALB	120H1222
	20	200–230/3/60	CSHN-176J	ZP236KCE-TW5 ²	24V AC 115/230V	238			SH240A3AA* SH240A3AB*	120H0289 120H0297	DSH240A3AAB DSH240A3ABB	120H1159 120H1161
		460/3/60	CSHN-176K	ZP236KCE-TWD ²	24V AC 115/230V				SH240A4AA* SH240A4AB*	120H0291 120H0299	DSH240A4AAB DSH240A4ABB	120H1119 120H1121
	25	200–230/3/60	CSHN-250J	ZP295KCE-TW5 ²	24V AC 115/230V	245	1½ × 1½	7765028	SH295A3AA* SH295A3AB*	120H0851 120H0853	DSH295A3AAB DSH295A3ABB	120H1163 120H1165
		460/3/60	CSHN-250K	ZP295KCE-TWD ²	24V AC 115/230V				SH295A4AA* SH295A4AB*	120H0825 120H0827	DSH295A4AAB DSH295A4ABB	120H1123 120H1125
	30	200–230/3/60	CSHN-315J	ZP385KCE-TW5 ²	24V AC 115/230V	351			SH380A3AA* SH380A3AB*	120H0151 120H0152	DSH381A3AAA DSH381A3ABA	120H1167 120H1169
		460/3/60	CSHN-315K	ZP385KCE-TWD ²	24V AC 115/230V				SH380A4AA* SH380A4AB*	120H0253 120H0255	DSH381A4AAA DSH381A4ABA	120H1127 120H1129
	40	200–230/3/60			24V AC 115/230V	386	1½ x 1½	120Z0504			DSH485A3AAA	120H1105
		460/3/60			24V AC 115/230V						DSH485A4AAB DSH485A4ABB	120H1131 120H1133

¹ Competitor Model Nos. beginning "ZP" may have different footprint, suction, discharge or height compared to Danfoss Model No.

² Control voltage of external motor protection module must be checked before crossing to Danfoss Model No with 24V ac or 115/230V motor protection module. Full range of models (refrigerant, tons, and voltage codes) available. Check Coolselector or visit our Online Datasheet Generator at www.danfoss.com/odsg.

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without consequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.

ENGINEERING
TOMORROW

