

4-Way Cassette Heat Pump Ductless System

Indoor Model: 45MBCAQ48XA3



Turn to the experts

Job Dat:

Tag #:

Date:

Location:


Carrier#:



- INDOOR STANDARD FEATURES**
- Modes: Cool, Heat, Dry, Fan, Auto
 - Built-in condensate lift pump
 - Outside Air Intake
 - Turbo Mode
 - Louver Control
 - Follow Me (senses temperature at handheld remote)
 - Auto-Restart function
 - Quiet indoor operation
 - Anti-corrosive fin coating
 - Ceiling Grille

- RESIDENTIAL APPLICATION LIMITED WARRANTY***
- Ten (10) years if properly registered within ninety (90) days after original installation, parts are warranted to the original purchaser for a period of ten (10) years. Otherwise, parts warranty is five (5) years.

NOTE: Images for illustration purposes only. Actual models may be slightly different.

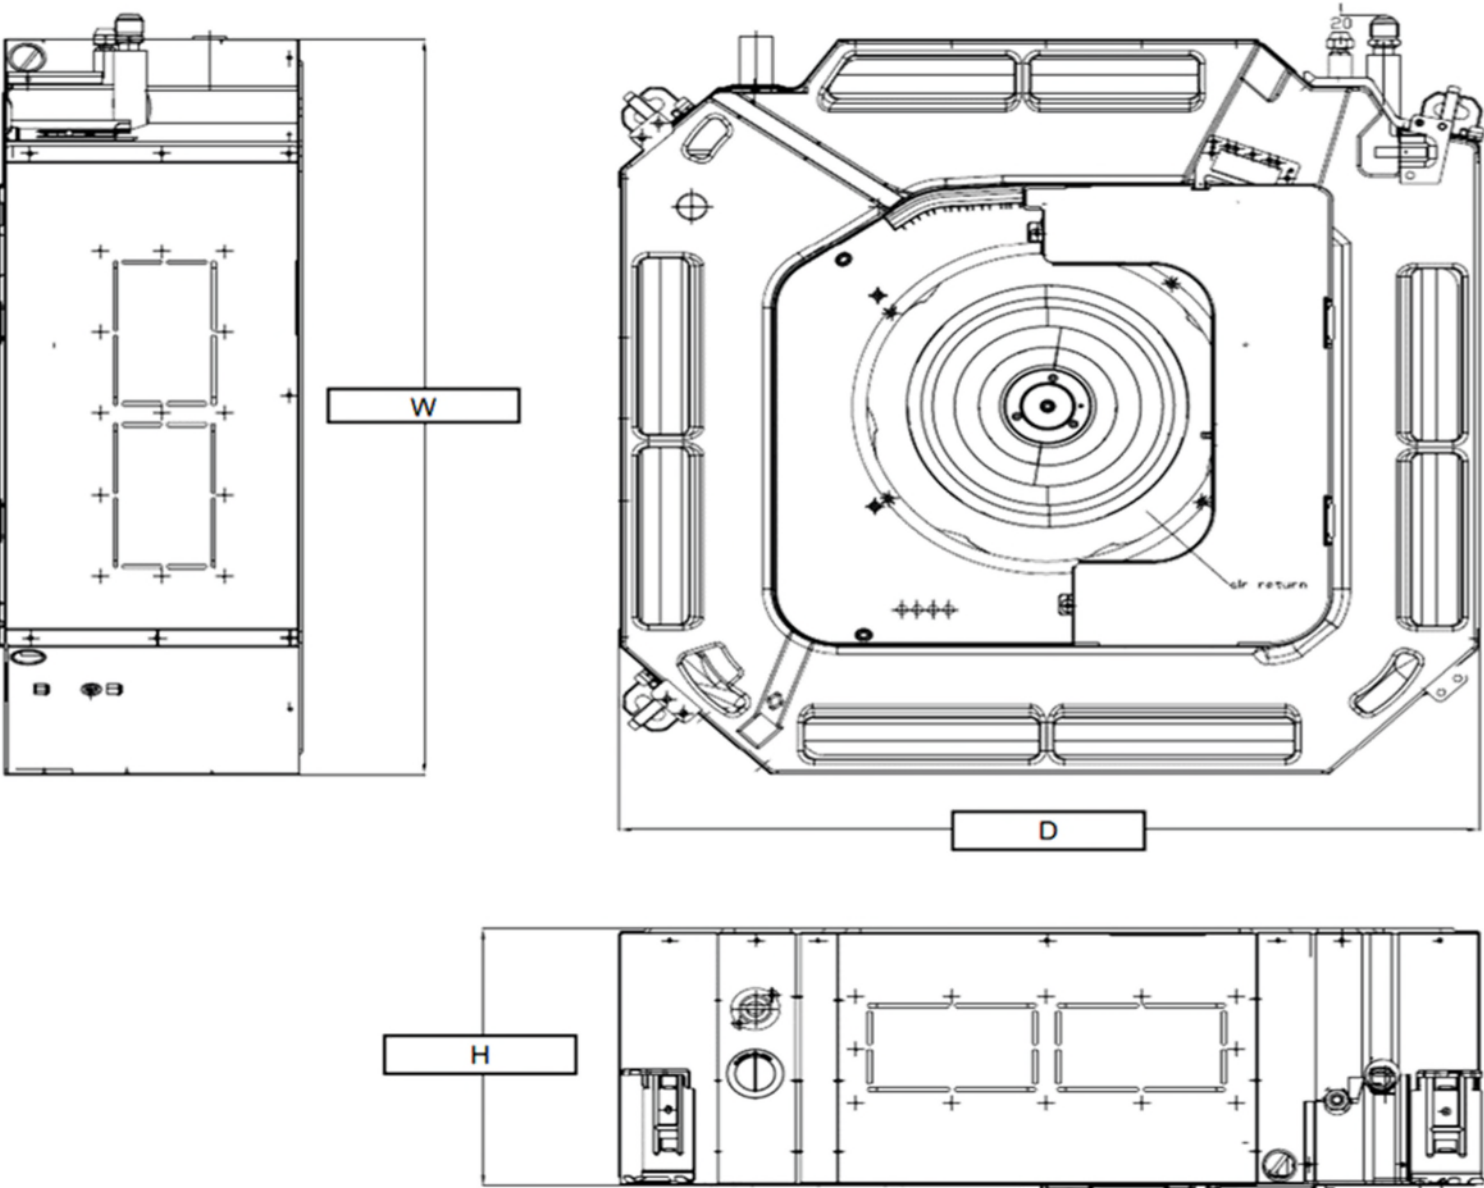

INDOOR UNIT DIMENSIONS				
Capacity	Unit	W	D	H
36K	in(mm)	570	570	245
48K/60K	in(mm)	22.44	22.44	9.65

Indoor - Heat Pump			
System	Indoor Model #		45MBCAQ48XA3
	Indoor Size		48000
Electrical	Voltage, Phase, Cycle	V/Ph/Hz	208-230/1/60
	Power Supply	Indoor unit powered by outdoor unit	
	MCA	A.	3
Operating Range	Cooling Indoor DB Min - Max	°F(°C)	60~90(16~32)
	Heating Indoor DB Min - Max	°F(°C)	32~86(0~30)
Indoor Coil	Face Area	Sq. Ft.	5.32
	No. Rows		3
	Fins per inch		20
	Circuits		10
Indoor Unit	Number of Fan Speeds		720/660/580
	Airflow (highest to lowest)	CFM	1118.30/1024.13/806.36
	Sound Pressure (highest to lowest)	dB(A)	52.0/49.5/41.5/38.0
	Moisture Removal	L/h	6.13
	Air Throw Data	ft(m)	14.76(4.5)
Dimensions	Body Height	in (mm)	11.30(287)
	Body Width	in (mm)	32.68(830)
	Body Depth	in (mm)	32.68(830)
	Body Net Weight	lbs (kg)	64.59(29.3)
	Shipping Height	in (mm)	12.99(330)
	Shipping Width	in (mm)	35.83(910)
	Shipping Depth	in (mm)	35.83(910)
	Shipping Net Weight	lbs (kg)	76.06(34.5)

Accessories		
Standard	Wireless Remote Controller (°F/°C Convertible)	
Required	Cassette Panel	45MBCQ02XXX4
Optional	Wired Remote Control 7 Day Programmable	KSACN1401AAA
	Wired Remote Control with Timer Function	KSACN1201AAA
	Wi-Fi™ Kit High Wall	KSAIF0701AAA
	24V Mini Interface	KSAIC0601230

