

NOTES:



1. NO STA-LOCK REQUIRED ON IMPELLER.
2. ASSEMBLE GROUND LEAD BETWEEN 2 PC 323 NUTS.
3. LOCATION OF IMPELLER TO BE .240/.160 FROM EDGE OF IMPELLER TO INSIDE OF HOUSING SHELL.
4. PACK 1 PER CONTAINER, 16 CONTAINERS PER LAYER, 4 LAYERS PER PALLET, 64 MAX. AMT. PER PALLET, PACKING ASSY. 87855353 (FOR REFERENCE ONLY), P.S. 88834200 AND P.S. 88834408.
5. CARTON LABELS MUST ALL FACE ONE DIRECTION TOWARD THE OPEN END OF THE PALLET. SEE P.S. 88834408.
6. NO PACKING TAPE OVER CARTON LABEL.

SWITCH LEAD MATERIAL
 18 GA. 105°C 3/64 INSUL.
 THERMO. RED
 47.00/45.00 IN. LONG
 FFLAG TERM. 89034045
 AMP 42742-2

APPLICATION	FLUE EXHAUST								
	B	LA	FR	A	S	C	E	B	A
	03	63	34	V	03	MM	5	0	0
CUSTOMER	FASCO DIST.								
CUSTOMER PART NO.	A159								

GROUND LEAD MATERIAL
 18 GA. 125°C 2/64 INSUL.
 X-LINKED POLY. GRN/YEL
 5.00/4.00 IN. LONG
 RING TERM. 89020156
 AMP 61794-1

LEAD MATERIAL
 18 GA. 125° 4/64 INSUL.
 EPDM. (2)BLACK
 54.00/52.00 IN. LONG
 FFLAG TERM. 89034045
 AMP 42742-2

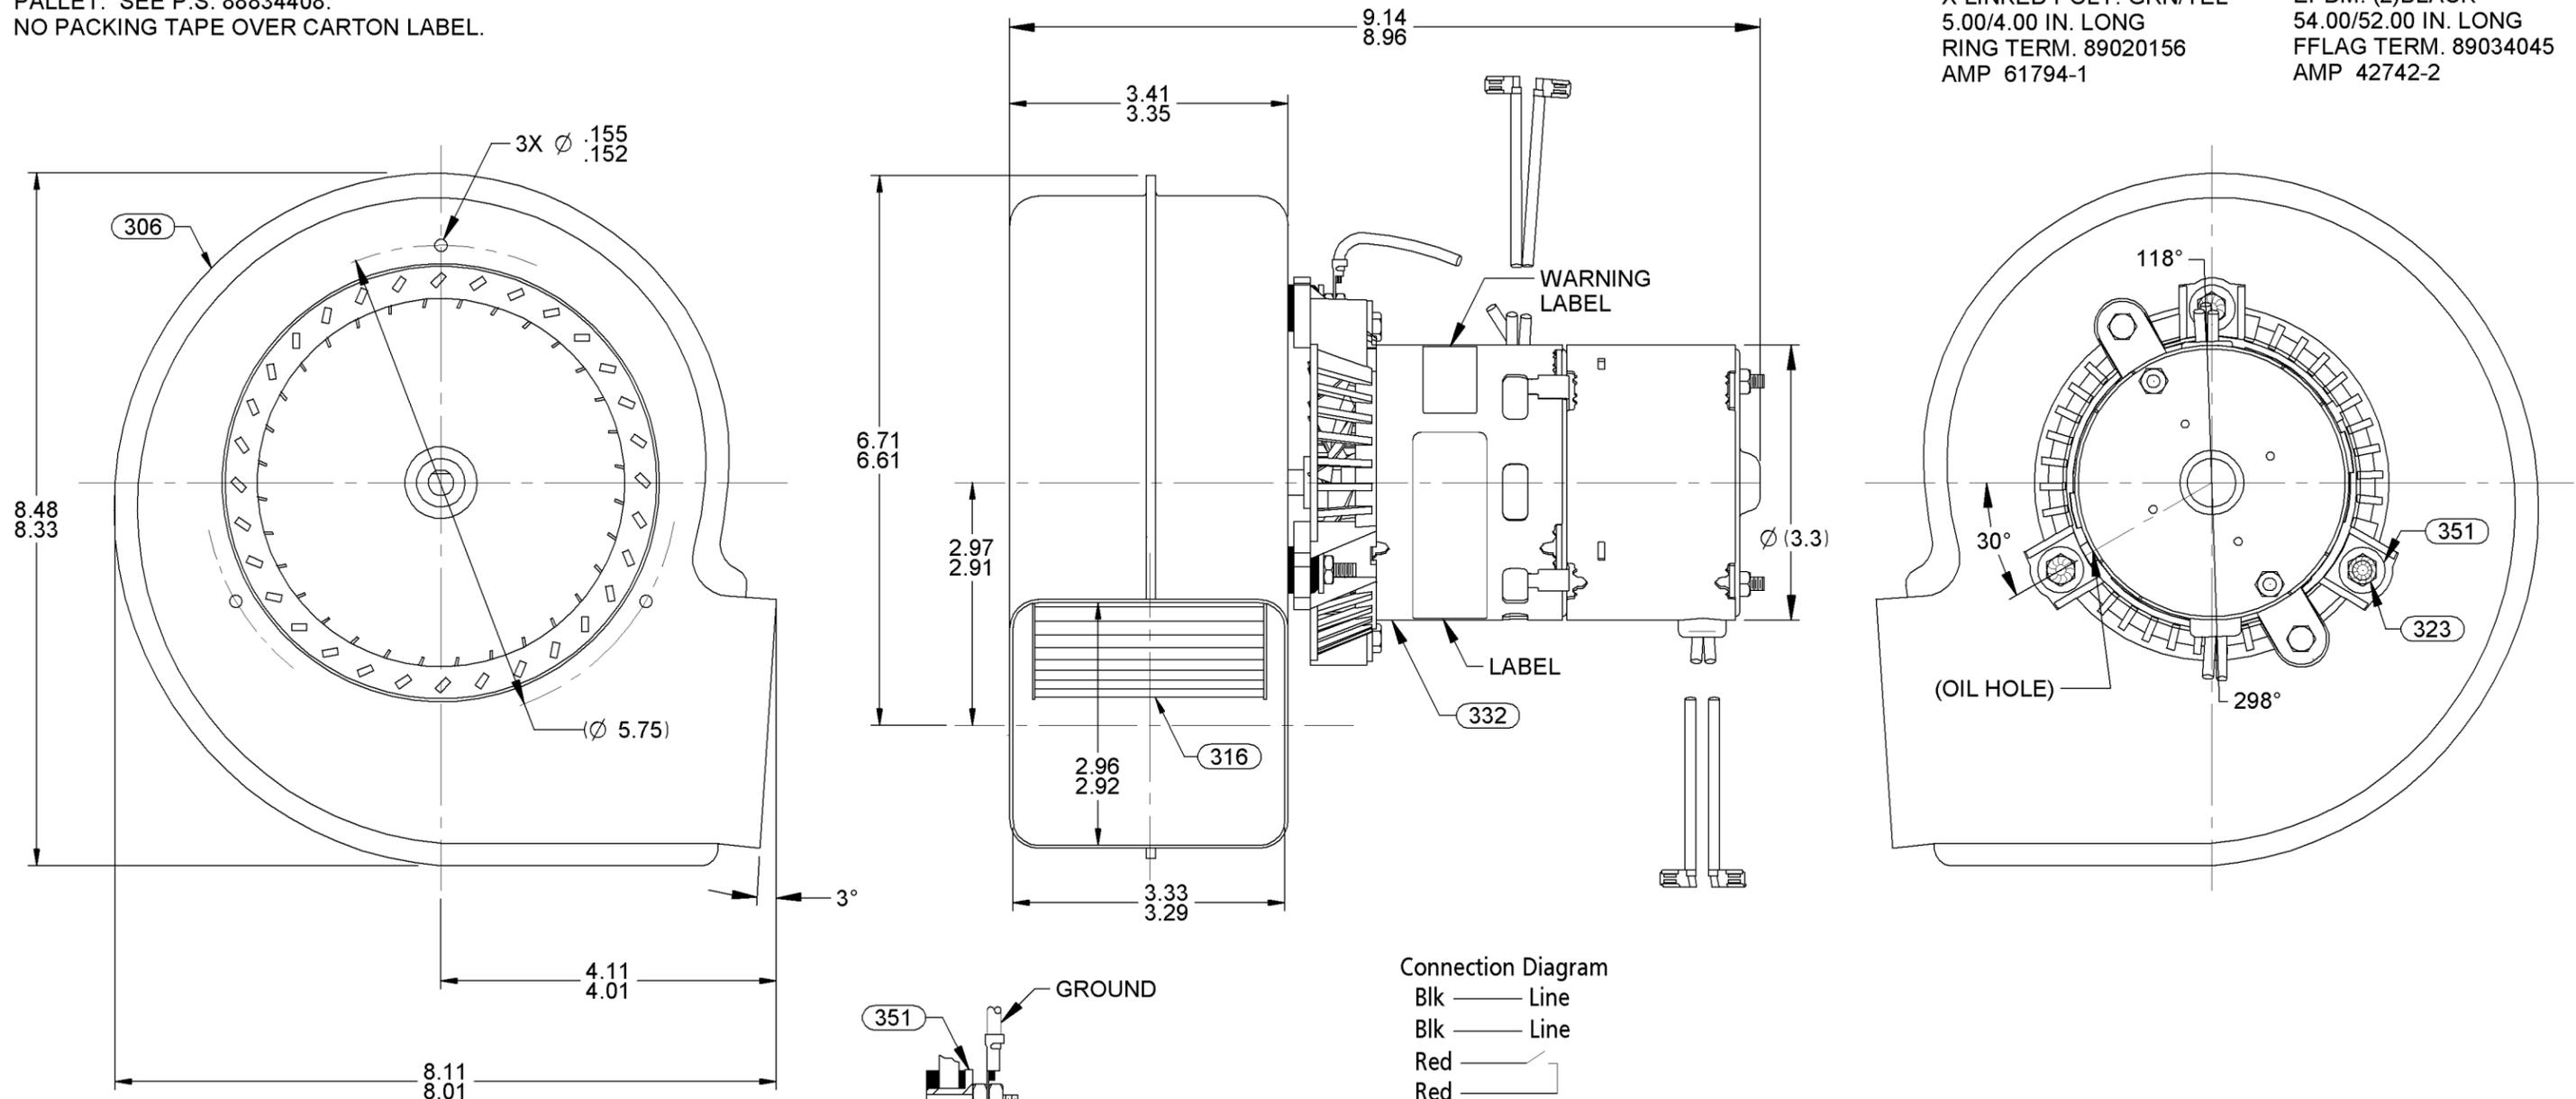

GROUND ATTACHMENT DETAIL

Connection Diagram
 Blk — Line
 Blk — Line
 Red — Line
 Red — Line
 Grn/Yel — Grd

TYPICAL PERFORMANCE TEST DATA
 IN FREE AIR
 AT 230 VOLTS 60 HZ.

ECO. NO.	REV.	DATE	APPROVAL
4012641	16	6/12/2014	SDM/MLM

R.P.M.	WATTS	AMPS
1573	66	.43

BLOWER WEIGHT 6.0 LBS. END PLAY .XX.XX

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:
 FRACTIONS ± 1/16 DECIMALS XX ± .01 ANGLES ± 1°
 XXX ± .005

APPROVALS	DATE
DRAWN VLL	02-27-07
CHECKED JMH	02-27-07
FINISH COLOR FLAT BLACK	

FASCO FASCO MOTORS GROUP
 AC MOTOR/BLOWER DIVISION

CONFIDENTIAL: DO NOT DUPLICATE OR DISCLOSE TO THIRD PARTIES WITHOUT WRITTEN PERMISSION OF FASCO MOTORS GROUP, AC MOTOR/BLOWER DIVISION.

TITLE BLOWER ASSEMBLY		
SIZE B	DWG. NO. 7063 7334	REV. 16
DO NOT SCALE DRAWING		SHEET 1 OF 1