

Residential & Light Commercial Heat Pump System

TOSHIBA
Carrier

Indoor Model: RAV-SM422CTP-UL

Outdoor Model: RAV-SP422AT2P-UL

Submittal Data

Job Name _____ Location _____
Tag _____



OUTDOOR UNIT STANDARD FEATURES

- Digital inverter compressor technology
- System can operate in cooling only mode with heating locked out
- Line lengths up to 246 ft
- Low-ambient cooling down to 5°F
- System diagnostics

OUTDOOR UNIT MODEL		RAV-SP422AT2P-UL
SYSTEM PERFORMANCE		
Nominal Cooling Capacity†	Btu/h	42,000
SEER		19.2
EER		9.8
Nominal Heating Capacity†	Btu/h	47,000
HSPF		11.3
COP		11.5
REFRIGERANT LINES		
Total Piping Length	ft	246
Vertical Lift	ft	98
Suction Line Size	in	5/8
Liquid Line Size	in	3/8
AMBIENT OPERATING RANGE		
Cooling DB Min ~ Max	F	-13~115
Heating DB Min ~ Max	F	-13~59
REFRIGERANT		R410A
FACTORY CHARGE	lbs	7.3

AIRFLOW		
Cooling	CFM	3570
Heating	CFM	3290
SOUND PRESSURE LEVEL		
Cooling	db(A)	54
Heating	db(A)	54
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Minimum Circuit Amps (MCA)	A	32
Recommended Fuse Size	A	40
Maximum Over Current Protection (MOCP)	A	40
PHYSICAL DATA		
Unit Width	in	35-3/8
Unit Height	in	52-3/4
Unit Length	in	12-5/8
Unit Weight - Net / Gross	lbs	234 / 247

Legend

db — Dry Bulb
SEER — Seasonal Energy Efficiency Ratio
HSPF — Heating Seasonal Performance Factor
wb — Wet Bulb

†Rated per AHRI (Air-Conditioning, Heating and Refrigeration Institute) 210/240 Standard.
Cooling: Indoor 80°F (27°C) db/67°F (20°C) wb; Outdoor 95°F (35°C) db
Heating: Indoor 70°F (21°C) db; Outdoor 47°F (8°C) db/43°F (6°C) wb



A221017

RAV-SM422CTP-UL UNDER CEILING FEATURES

- R-410A refrigerant
- Six sizes from 18,000 to 48,000 Btu/h
- Outside Air Knockout
- Quiet operation (as low as 35dBA)
- Vertical airflow can be set to swing or fixed position
- Auto or manually set three fan speeds
- Easy to remove cleanable filter

INDOOR UNIT MODEL		RAV-SM422CTP-UL
PERFORMANCE		
Cooling Rated Capacity	Btu/h	42,000
Heating Rated Capacity	Btu/h	47,000
Fan Type (Qty)		Centrifugal (3)
Airflow (H/M/L)	CFM	1095/900/705
Sound Pressure (H/M/L)	dBA	44/41/35
ELECTRICAL		
Power Supply	V/Ph/Hz	From ODU
FILTER		
Type		Washable
Quantity		2
MERV Corresponding Value		5
Dimensions (H x W x D)	in.	9-3/4 x 29-1/8 x 1/2

PHYSICAL DATA		
Pipe Connection Size - Liquid (High Pressure)	in	3/8 (Flare)
Pipe Connection Size - Gas (Low Pressure)	in	5/8 (Flare)
Condensate Drain Connection	in	1
Refrigerant		R-410A
External Finish		Munsell N9.1
Unit Width	in	62-1/2
Unit Height	in	9-1/4
Unit Depth	in	27-1/4
Unit Net Weight	lb	84
MOTOR		
Motor Type		DC
Motor Watts	W	139

ACCESSORIES

- ☐ Wired Remote Controller (7-Day Programmable) RBC-AMS54E-UL
- ☐ Simple Wired Remote Controller RBC-AS41UL
- ☐ Stand-Alone Receiver with Wireless Remote Controller TCB-AX32UL
- ☐ Integral Receiver with Wireless Remote RBC-AX33C-UL
- ☐ Remote Sensor TCB-TC41LUL
- ☐ Wired Remote Controller RBC-AMT32UL
- ☐ Elbow Piping Kit TCB-KP24CPE
- ☐ Condensate Drain Pump Kit TCB-DP31CE
- ☐ Auxiliary Outside Air Flange TCB-FF101URUL

[illegible]

Mounting hole sold separately
24- $\varnothing$ 0.1"(3) emboss)


AHRI CERTIFIED™
www.ahridirectory.org

Unitary Small HP
AHRI Standard 210/240

Certification applies only when the complete system
is listed with AHRI.

DIMENSIONAL DRAWING

INDOOR UNIT UNDER CEILING RAV-SP422CTP-UL

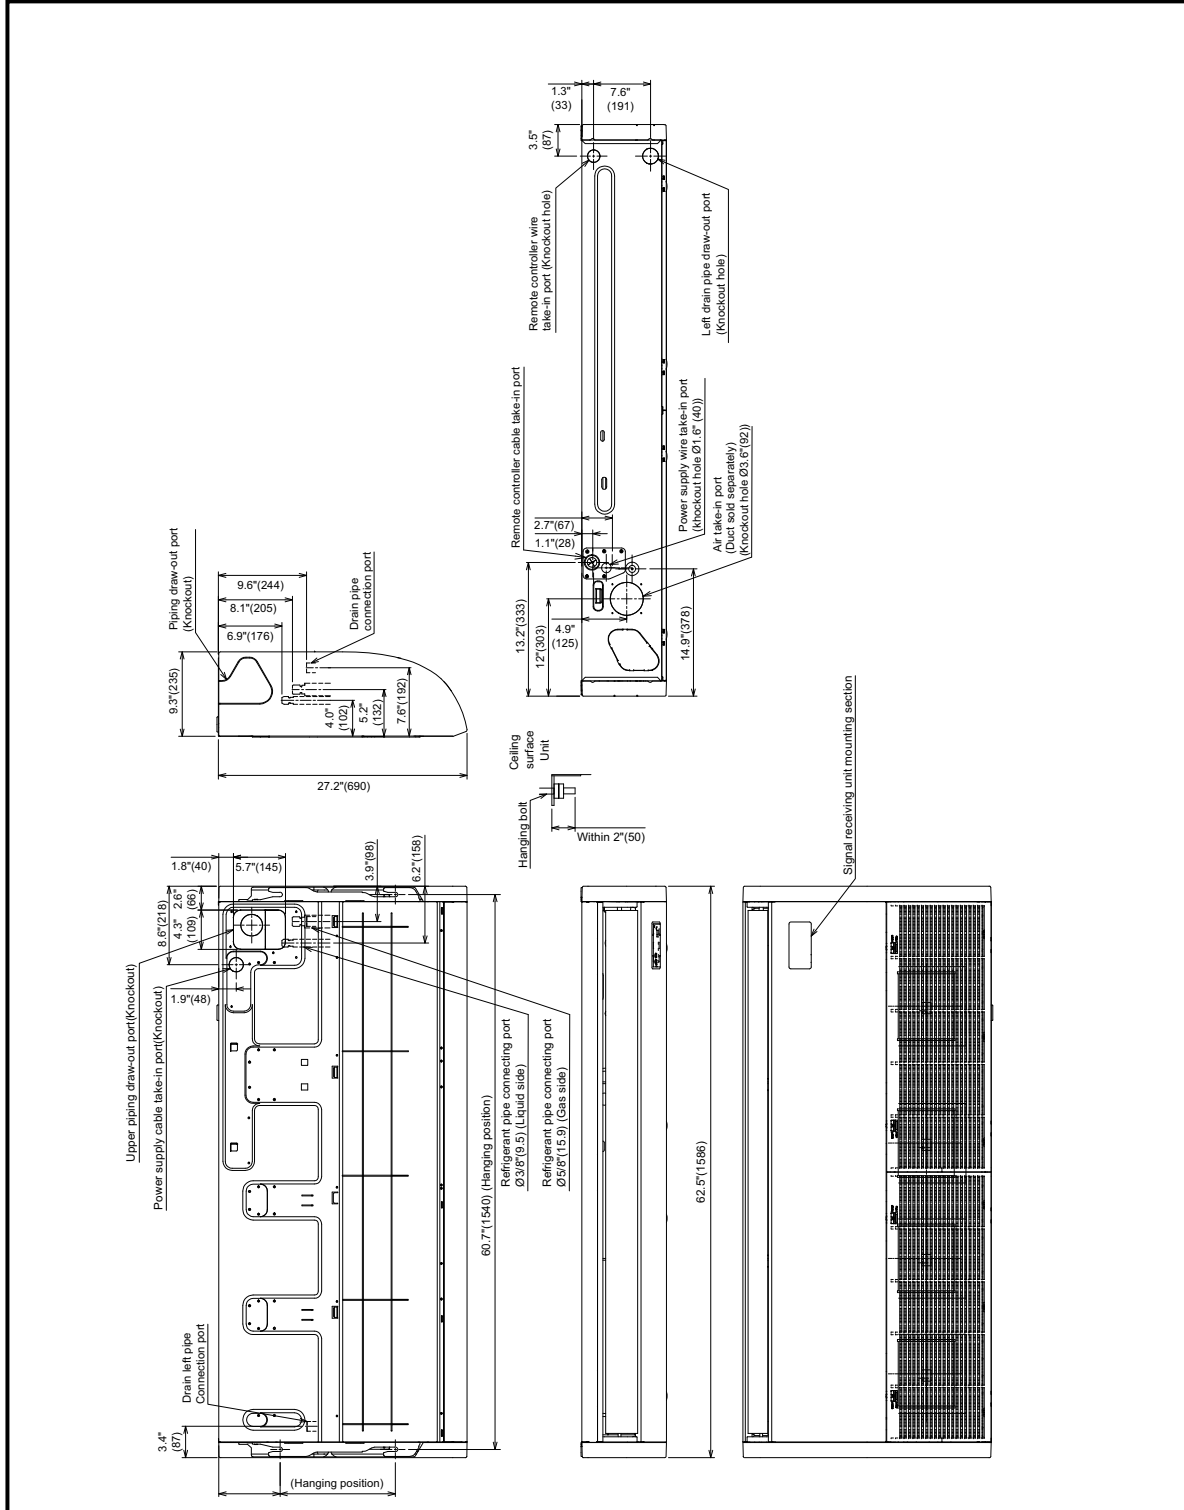

A221102