

Air Handler Heat Pump Ductless System

Indoor Model: 45MBAAQ30XB3



Turn to the experts

Job Data:

Tag #:

Date:

Location:


Carrier#:



- INDOOR STANDARD FEATURES**
- Modes: Cool, Heat, Dry, Fan, Auto
 - 4-way installation (Up flow, Down flow, Right, Left)
 - Auto-Restart function
 - Quiet indoor operation
 - Aluminum hydrophilic pre-coated fins

- RESIDENTIAL APPLICATION LIMITED WARRANTY***
- Ten (10) years if properly registered within ninety (90) days after original installation, parts are warranted to the original purchaser for a period of ten (10) years. Otherwise, parts warranty is five (5) years.

NOTE: Images for illustration purposes only. Actual models may be slightly different.

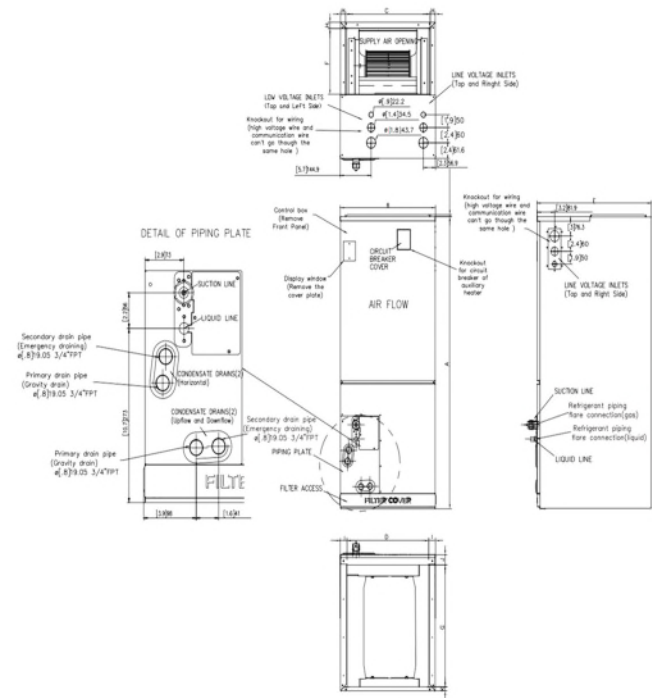

45MBAAQ30XB3			
System	Indoor Model #		45MBAAQ30XB3
	Indoor Size		30000
Electrical	Voltage, Phase, Cycle	V/Ph/Hz	208-230/1/60
	Power Supply	Indoor unit powered by outdoor unit	
Operating Range	MCA	A.	6
	Cooling Indoor DB Min - Max	°F(°C)	60~90 (16~32)
Indoor Coil	Heating Indoor DB Min - Max	°F(°C)	32~86 (0~30)
	Face Area	Sq. Ft.	4.13
Indoor Unit	No. Rows		4
	Fins per inch		20
Dimensions	Circuits		10
	Number of Fan Speeds		685/620/560
Indoor Unit	Airflow (highest to lowest)	CFM	988.8 / 894.7 / 806.4 / 712.2 / N/A
	Sound Pressure (highest to lowest)	dB(A)	N/A/44/41/26/N/A
Dimensions	Height	in (mm)	49.02(1245)
	Width	in (mm)	21.02(534)
Dimensions	Depth	in (mm)	21.02(534)
	Net Weight	lbs (kg)	127.43(57.8)
Dimensions	Shipping Height	in (mm)	21.20(640)
	Shipping Width	in (mm)	52.17(1325)
Dimensions	Shipping Depth	in (mm)	24.61(625)
	Shipping Net Weight	lbs (kg)	151.68(68.8)
CONTROLS			
Standard	Wireless Remote Controller (°F/°C Convertible)		
Optional	Wired Remote Control 7 Day Programmable		KSACN1401AAA
	24V Mini Interface		KSAIC0601230

INDOOR UNIT DIMENSIONS					
Dimensions		18K/24K		36K	
		Inch	mm	Inch	mm
A	Model Height	45	1143	49	1245
B	Model Width	17.5	445	21	534
C	S.A. Opening Width	15.6	397	19.1	486
D	R.A. Opening Width	15.1	384	18.6	473
E	Model Depth	21	534	21	534
F	S.A. Opening Depth	10.3	260	10.3	260
G	R.A. Opening Depth	18.8	476	18.8	476
H	S.A. Opening Clearance	0.9	24	0.9	24
I	R.A. Opening Side Clearance	1.3	32	1.3	32
J	R.A. Opening Front Clearance	1.5	38	1.6	41
K	R.A. Opening Back Clearance	0.6	16	0.6	16



Puron Advance™