

# High Static Ducted Slim Heat Pump Ductless System




Indoor Model: 45MBDAQ48XH3

Turn to the experts

Job Dat:   
 Tag #:   
 Date:

Location:   
 Carrier#:

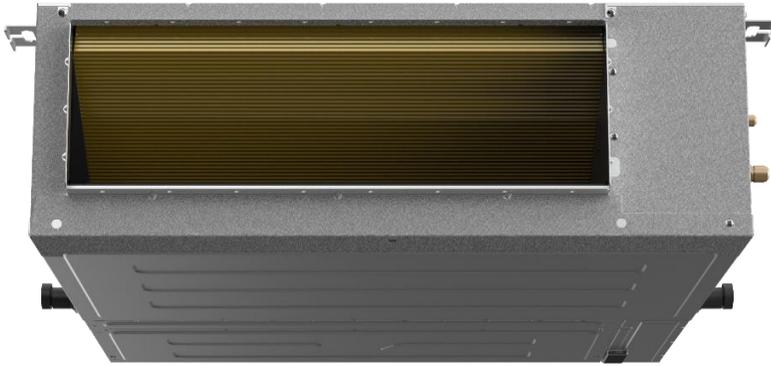

### INDOOR STANDARD FEATURES


- Modes: Cool, Heat, Dry, Fan, Auto
- Vertical or Horizontal Installation
- Rear or Bottom Return
- Outside Air Intake
- Condensate Lift pump shipped with the unit
- Follow Me (senses temperature at handheld remote)
- Auto-Restart function
- Quiet indoor operation
- Anti-corrosive fin coating

### RESIDENTIAL APPLICATION LIMITED WARRANTY\*


- Ten (10) years if properly registered within ninety (90) days after original installation, parts are warranted to the original purchaser for a period of ten (10) years. Otherwise, parts warranty is five (5) years.

NOTE: Images for illustration purposes only. Actual models may be slightly different.

### Air outlet dimensions

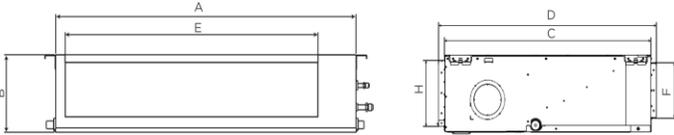

### Air inlet dimensions

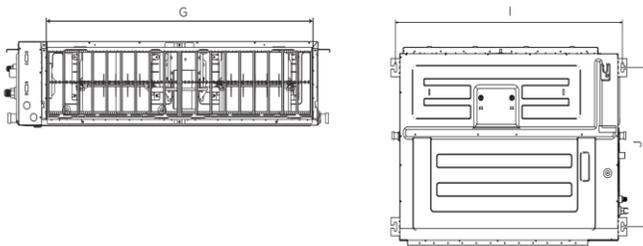

Indoor - Heat Pump			
<b>System</b>	<b>Indoor Model #</b>	45MBDAQ48XH3	
	<b>Indoor Size</b>	48000	
<b>Electrical</b>	<b>Voltage, Phase, Cycle</b>	V/Ph/Hz	208-230/1/60
	<b>Power Supply</b>	Indoor unit powered by outdoor unit	
	<b>MCA</b>	A.	5
<b>Operating Range</b>	<b>Cooling Indoor DB Min - Max</b>	*F(°C)	60~90(16~32)
	<b>Heating Indoor DB Min - Max</b>	*F(°C)	32~86(0~30)
<b>Indoor Coil</b>	<b>No. Rows</b>	4	
	<b>Fins per inch</b>	19	
	<b>Circuits</b>	9	
<b>Indoor Unit</b>	<b>Number of Fan Speeds</b>	1000/950/880	
	<b>Airflow (highest to lowest)</b>	CFM	1648.08 / 1471.50 / 1294.92 / 1059.48 //
	<b>Sound Pressure (highest to lowest)</b>	dB(A)	N/A/51/46/42/40
<b>Dimensions</b>	<b>Body Height</b>	in (mm)	11.81(300)
	<b>Body Width</b>	in (mm)	47.24(1200)
	<b>Body Depth</b>	in (mm)	29.53(750)
	<b>Body Net Weight</b>	lbs (kg)	111.33(50.5)
	<b>Shipping Height</b>	in (mm)	14.13(359)
	<b>Shipping Width</b>	in (mm)	56.10(1425)
	<b>Shipping Depth</b>	in (mm)	33.86(860)
	<b>Shipping Net Weight</b>	lbs (kg)	124.78(56.6)
<b>Accessories</b>			
<b>Standard</b>	Wireless Remote Controller (*F/°C Convertible)		
<b>Optional</b>	Wired Remote Control 7 Day Programmable	KSACN1401AAA	
	Wired Remote Control with Timer Function	KSACN1201AAA	
	24V Mini Interface	KSAIC0601230	

### INDOOR UNIT DIMENSIONS

Capacity	Unit	OUTLINE DIMENSION			
		A	B	C	D
36K/48K	inch/mm	47.2/1200	11.8/300	29.5/750	31.3/795
		AIR OUTLET OPENING SIZE		AIR RETURN OPENING SIZE	
		E	F	G	H
		40.4/1027	9.2/233	43.0/1092	10.5/267
		SIZE OF MOUNTED LUG			
I	J	48.8/1240	25.2/640		



Puron Advance™