

Multipoise Crossover Air Handler

Indoor Model: 45MUAQ60XX3



Turn to the experts

Job Data:
Tag #:
Date:

Location:
Carrier#:




INDOOR STANDARD FEATURES

- Modes: Cool, Heat, Dry, Fan, Auto
- Factory installed leak detection system
- Conventional Lineset
- Dual Voltage (115V/230V)
- Constant Air Motor/Blower
- Quiet indoor operation
- Anti-corrosive fin coating

RESIDENTIAL APPLICATION LIMITED WARRANTY*

- Ten (10) years if properly registered within ninety (90) days after original installation, parts are warranted to the original purchaser for a period of ten (10) years. Otherwise, parts warranty is five (5) years.

NOTE: Images for illustration purposes only. Actual models may be slightly different.

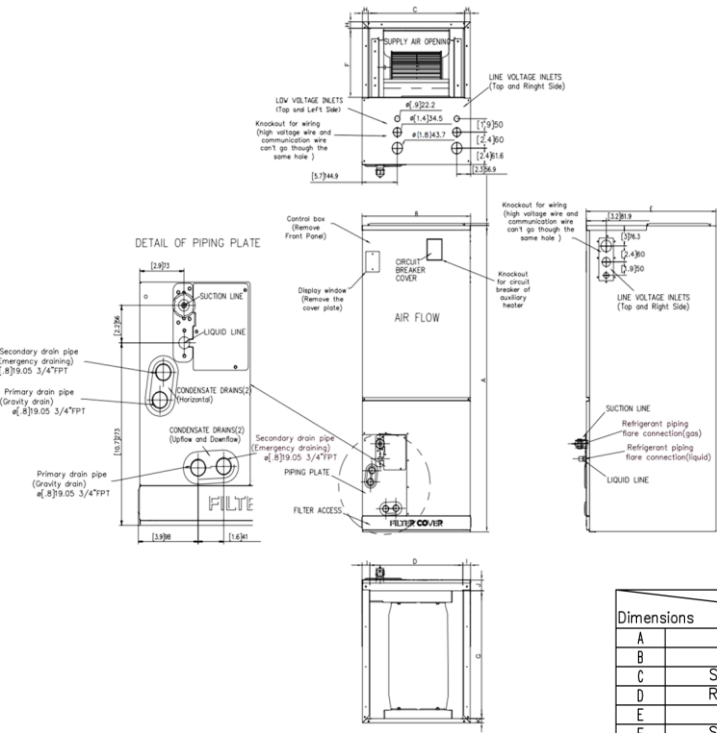

45MUAQA60XX3			
System	Indoor Model #		45MUAQA60XX3
	Indoor Size		60000
Electrical	Voltage, Phase, Cycle	V/Ph/Hz	115-208-230/1/60
	Power Supply	Indoor unit powered separate from outdoor unit	
Operating Range	MCA	A.	11
	Cooling Indoor DB Min - Max	*F(*C)	60~90(16~32)
	Heating Indoor DB Min - Max	*F(*C)	32~86(0~30)
Indoor Coil	Face Area	Sq. Ft.	4.88
	No. Rows		5
	Fins per inch		20
	Circuits		14
Indoor Unit	Number of Fan Speeds		820/720/615
	Airflow (highest to lowest)	CFM	1807.0~1136.0
	Sound Pressure	dB(A)	34.5
Dimensions	Height	in (mm)	52.99(1346)
	Width	in (mm)	24.49(622)
	Depth	in (mm)	21.02(534)
	Net Weight	lbs (kg)	162.92(73.9)
	Shipping Height	in (mm)	21.20(640)
	Shipping Width	in (mm)	56.30(1430)
	Shipping Depth	in (mm)	28.15(715)
	Shipping Net Weight	lbs (kg)	(190.92)86.6
CONTROLS			
Standard	Wireless Remote Controller (*F/*C Convertible)		
Optional	Wired Remote Control 7 Day Programmable		KSACN1401AAA

Dimensions		Model(Btu/h)		18K/24K		30K/36K		48K/60K	
				inch	mm	inch	mm	inch	mm
A	Model Height			45	1143	49	1245	53	1346
B	Model Width			17.5	445	21	534	24.5	622
C	Supply Air Opening Width			15.6	397	19.1	486	22.6	575
D	Return Air Opening Width			15.1	384	18.6	473	22.1	562
E	Model Depth			21	534	21	534	21	534
F	Supply Air Opening Depth			10.3	260	10.3	260	10.3	260
G	Return Air Opening Depth			18.8	476	18.8	476	18.8	476
H	Supply Air Opening Clearance			.9	24	.9	24	.9	24
I	Return Air Opening Side Clearance			1.3	32	1.3	32	1.1	28
J	Return Air Opening Front Clearance			1.5	38	1.6	41	1.6	41
K	Return Air Opening Back Clearance			.6	16	.6	16	.8	19
J	Refrigerant piping flareconnection(gas)			.8	19	.8	19	.9	22
K	Refrigerant piping flareconnection(liquid)			.4	9	.4	9	.4	9



Puron Advance™