

Pliers
Strippers, Cutters, and Crimpers
Drivers and Wrenches
Conduit Tools and Measurement
Tool Kits
Safety, PPE and Comfort
Jobsite Accessories
Tool Storage
Voice/Data/Video
Test and Measurement
Power Tools and Accessories
Lifting, Pulling, and Structural


Cushion-Grip Nut Drivers

Meets or exceeds applicable ASME / ANSI and MIL specifications

Handle end is also color coded for easy identification



Tip-Ident™ quickly identifies size and orientation

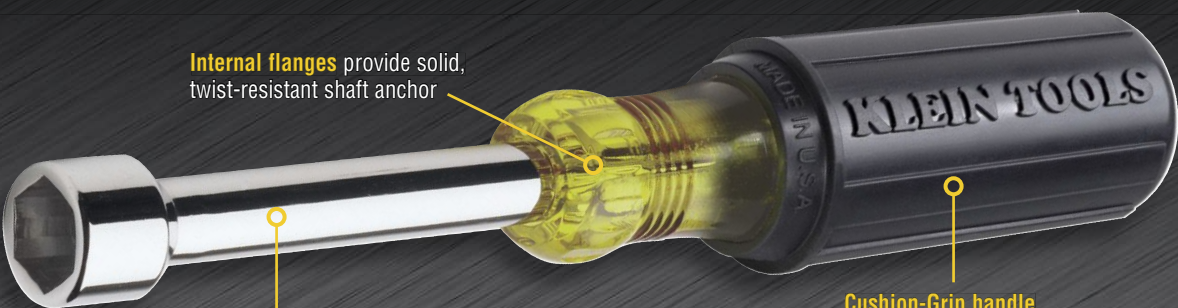

Internal flanges provide solid, twist-resistant shaft anchor

Premium chrome-plated shaft for smooth feel and corrosion resistance

Cushion-Grip handle for greater torque and comfort

Magnetic-Tip Hollow-Shaft Nut Drivers

Includes core Cushion-Grip Nut Driver features plus:

- Exclusive hollow shaft* design with Rare Earth magnetic tip features unobstructed pass-through, even on long bolts



630-3/8M



Cat. No.	Nut Driver Sizes	Shaft Length	Color Code	Overall Length
610-1/4M	1/4"	1.5" (38.1 mm)	Red	3.5" (88.9 mm)
610-5/16M	5/16"	1.5" (38.1 mm)	Yellow	3.5" (88.9 mm)
630-3/16M*	3/16"	3" (76.2 mm)	Black	6.75" (171.5 mm)
630-1/4M	1/4"	3" (76.2 mm)	Red	6.75" (171.5 mm)
630-5/16M	5/16"	3" (76.2 mm)	Yellow	6.75" (171.5 mm)
630-11/32M	11/32"	3" (76.2 mm)	Green	6.75" (171.5 mm)
630-3/8M	3/8"	3" (76.2 mm)	Blue	6.75" (171.5 mm)
630-7/16M	7/16"	3" (76.2 mm)	Brown	7.313" (185.8 mm)
630-1/2M	1/2"	3" (76.2 mm)	Red	7.313" (185.8 mm)
646-3/16M*	3/16"	6" (152.4 mm)	Black	9.75" (247.7 mm)
646-1/4M	1/4"	6" (152.4 mm)	Red	9.75" (247.7 mm)
646-5/16M	5/16"	6" (152.4 mm)	Yellow	9.75" (247.7 mm)
646-11/32M	11/32"	6" (152.4 mm)	Green	9.75" (247.7 mm)
646-3/8M	3/8"	6" (152.4 mm)	Blue	9.75" (247.7 mm)
646-7/16M	7/16"	6" (152.4 mm)	Brown	10.313" (262 mm)
646-1/2M	1/2"	6" (152.4 mm)	Red	10.313" (262 mm)
618-1/4M	1/4"	18" (457.2 mm)	Red	21.75" (552.5 mm)
618-5/16M	5/16"	18" (457.2 mm)	Yellow	21.75" (552.5 mm)

*3/16" magnetic nut driver does not have a hollow shaft.

Cushion-Grip Nut Driver Sets				
631M 7-Pc	647M 7-Pc	630M 2-Pc	646M 2-Pc	610M 2-Pc
—	—	—	—	•
—	—	—	—	•
•	—	—	—	—
•	—	•	—	—
•	—	•	—	—
•	—	—	—	—
•	—	—	—	—
•	—	—	—	—
—	•	—	—	—
—	•	—	•	—
—	•	—	•	—
—	•	—	—	—
—	•	—	—	—
—	•	—	—	—
—	•	—	—	—
—	—	—	—	—
—	—	—	—	—

Coated Hollow-Shaft Nut Drivers

Includes core Cushion-Grip Nut Driver features plus:

- Entire shaft has non-insulated plastic coated for circuit protection only
- Special plastic coating resists cutting, cracking and chipping
- Thin coating permits use in confined areas



640-1/2

Cat. No.	Nut Driver Sizes	Shaft Length	Color Code	Overall Length
640-3/16	3/16"	3" (76.2 mm)	Black	6.75" (171.5 mm)
640-1/4	1/4"	3" (76.2 mm)	Red	6.75" (171.5 mm)
640-5/16	5/16"	3" (76.2 mm)	Yellow	6.75" (171.5 mm)
640-3/8	3/8"	3" (76.2 mm)	Blue	6.75" (171.5 mm)
640-7/16	7/16"	3" (76.2 mm)	Brown	7.313" (185.8 mm)
640-1/2	1/2"	3" (76.2 mm)	Red	7.313" (185.8 mm)
640-9/16	9/16"	4" (101.6 mm)	Orange	9.375" (238.1 mm)
640-5/8	5/8"	4" (101.6 mm)	Yellow	9.375" (238.1 mm)

⚠ WARNING: NOT insulated. Coating is intended for protection of circuits only.

