

Side-Cutting Long-Nose Pliers



FORGED STEEL

from Klein's US-made proprietary blend

Induction-hardened
cutting knives for long life

Hot-riveted joint
ensures smooth action
and no handle wobble

Slim head design
for working in
confined areas

Side-Cutting Long-Nose Pliers

Includes core long-nose features plus:

- Heavier design for greater cutting power
- Knurled jaws for grabbing and looping wire
- Extended handles provide added reach and greater leverage
- Curved handles provide greater tool control
- Spring-loaded action for self-opening (Cat. Nos. D203-6C and D203-7C)



D203-6C

D203-8NCR

HANDLE FINISH




Plastic-Dipped

GLOW-IN-THE-DARK
Plastic-Dipped

JOURNEYMAN™
Dual-Material

INS INSULATED
2-Layer
Protection

EINS INSULATED
3-Layer
Protection

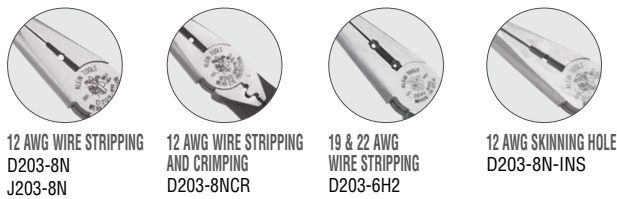

12 AWG WIRE STRIPPING
D203-8N
J203-8N

12 AWG WIRE STRIPPING
AND CRIMPING
D203-8NCR

19 & 22 AWG
WIRE STRIPPING
D203-6H2

12 AWG SKINNING HOLE
D203-8N-INS

Cat. No.	Overall Length	Jaw Length	Jaw Width	Jaw Thickness	Point Diameter	Knife Length	Handle Color	Handle Finish
Heavy-Duty Design With Extended Handles								
2038EINS	8.875" (225.4 mm)	2.313" (58.8 mm)	1" (25.4 mm)	1/2" (12.7 mm)	0.125" (3.2 mm)	0.625" (15.9 mm)	Orange/Gray	3-Layer Insulated
D203-8	8.438" (214.3 mm)	2.313" (58.8 mm)	1" (25.4 mm)	1/2" (12.7 mm)	1/8" (3.18 mm)	0.625" (15.9 mm)	Yellow	Plastic-Dipped
D203-8N	8.438" (214.3 mm)	2.313" (58.8 mm)	1" (25.4 mm)	1/2" (12.7 mm)	1/8" (3.18 mm)	0.625" (15.9 mm)	Yellow	Plastic-Dipped
D203-8-GLW	8.438" (214.3 mm)	2.313" (58.8 mm)	1" (25.4 mm)	1/2" (12.7 mm)	1/8" (3.18 mm)	0.625" (15.9 mm)	Glow in the Dark	Plastic-Dipped
D203-8-INS	8.875" (225.4 mm)	2.313" (58.8 mm)	1" (25.4 mm)	1/2" (12.7 mm)	0.125" (3.2 mm)	0.625" (15.9 mm)	Orange	2-Layer Insulated
D203-8N-INS	8.875" (225.4 mm)	2.313" (58.8 mm)	1" (25.4 mm)	1/2" (12.7 mm)	0.125" (3.2 mm)	0.625" (15.9 mm)	Orange	2-Layer Insulated
D203-8NCR	8.438" (214.3 mm)	2.313" (58.8 mm)	1" (25.4 mm)	1/2" (12.7 mm)	1/8" (3.18 mm)	0.625" (15.9 mm)	Yellow	Plastic-Dipped
J203-8	8.563" (217.5 mm)	2.313" (58.8 mm)	1" (25.4 mm)	1/2" (12.7 mm)	1/8" (3.18 mm)	0.625" (15.9 mm)	Yellow/Black	Journeyman
J203-8N	8.563" (217.5 mm)	2.313" (58.8 mm)	1" (25.4 mm)	1/2" (12.7 mm)	1/8" (3.18 mm)	0.625" (15.9 mm)	Yellow/Black	Journeyman
Standard Design With Curved Handles								
2036EINS	6.875" (174.6 mm)	1.938" (49.2 mm)	0.688" (17.5 mm)	3/8" (9.5 mm)	.094" (2.4 mm)	0.5" (12.7 mm)	Orange/Gray	3-Layer Insulated
2037EINS	7.375" (187.3 mm)	2.438" (61.9 mm)	0.688" (17.5 mm)	3/8" (9.5 mm)	.094" (2.4 mm)	0.5" (12.7 mm)	Orange/Gray	3-Layer Insulated
D203-6	6.625" (168.3 mm)	1.875" (47.6 mm)	0.688" (17.5 mm)	3/8" (9.5 mm)	3/32" (2.38 mm)	0.5" (12.7 mm)	Yellow	Plastic-Dipped
D203-6C	6.625" (168.3 mm)	1.875" (47.6 mm)	0.688" (17.5 mm)	3/8" (9.5 mm)	3/32" (2.38 mm)	0.5" (12.7 mm)	Yellow	Plastic-Dipped
D203-6-INS	6.875" (174.6 mm)	1.938" (49.2 mm)	0.688" (17.5 mm)	3/8" (9.5 mm)	.094" (2.4 mm)	0.5" (12.7 mm)	Orange	2-Layer Insulated
D203-7	7.188" (182.6 mm)	2.438" (61.9 mm)	0.688" (17.5 mm)	3/8" (9.5 mm)	3/32" (2.38 mm)	0.5" (12.7 mm)	Yellow	Plastic-Dipped
D203-7C	7.188" (182.6 mm)	2.438" (61.9 mm)	0.688" (17.5 mm)	3/8" (9.5 mm)	3/32" (2.38 mm)	0.5" (12.7 mm)	Yellow	Plastic-Dipped
D203-7-INS	7.375" (187.3 mm)	2.438" (61.9 mm)	0.688" (17.5 mm)	3/8" (9.5 mm)	.094" (2.4 mm)	0.5" (12.7 mm)	Orange	2-Layer Insulated
D203-6H2	6.625" (168.3 mm)	1.875" (47.6 mm)	0.688" (17.5 mm)	3/8" (9.5 mm)	3/32" (2.4 mm)	0.5" (12.7 mm)	Yellow	Plastic-Dipped
J203-6	6.75" (171.5 mm)	1.875" (47.6 mm)	0.688" (17.5 mm)	3/8" (9.5 mm)	3/32" (2.4 mm)	0.5" (12.7 mm)	Yellow/Black	Journeyman
J203-7	7.313" (185.8 mm)	2.438" (61.9 mm)	0.688" (17.5 mm)	3/8" (9.5 mm)	3/32" (2.4 mm)	0.5" (12.7 mm)	Yellow/Black	Journeyman



Pliers
Strippers, Cutters,
and Crimpers
Wrenches and
Conduit Tools
and Measurement
Tool Kits
Safety, PPE
and Comfort
Jobsite
Accessories
Tool Storage
Voice/Data/Video
Test and
Measurement
Power Tools
and Accessories
Lifting, Pulling,
and Structural