

SFD Suction Line Filter Drier

The SFD is a standard suction line filter drier for use after a burnout or when major work has been performed. It is for use with CFC, HCFC and HFC refrigerants.

Features

- Solid copper connections
- Dual access valves for easy pressure readings
- Corrosion resistant epoxy powder paint finish
- R-410A compatible

Nomenclature example: SFD 13S5-VV


SFD	13	S	5	VV
Series	Unit Size (in cu. in.)	Connections S = ODF F = SAE	Connection Size (in 1/8")	Dual Access Valves



Specifications

- Filtration: 40 microns
- Maximum working pressure: 500 psig
- UL/CUL file number: SA 3124

Dimensional Data

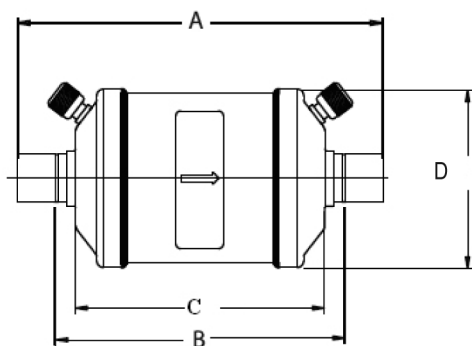

Order Information

PCN	Description	Connection Size	Dimensions (in)				Weight (lbs)
			A	B	C	D	
064045	SFD 08S4-VV	1/2 ODF	4.94	3.94	3.38	3.14	2
064046	SFD 08S5-VV	5/8 ODF	5.16	3.91			
064047	SFD 08S6-VV	3/4 ODF	5.56	4.31		3.64	
060244	SFD 13F3-VV	3/8 SAE	5.50	N/A			
060245	SFD 13S3-VV	3/8 ODF	4.84	3.97	5.13		
060246	SFD 13S4-VV	1/2 ODF	4.94	3.94			
060247	SFD 13S4-VV	1/2 ODF	5.75	N/A		8.25	
060248	SFD 13F5-VV	5/8 SAE	6.13	N/A			
060249	SFD 13S5-VV	5/8 ODF	5.16	3.91	3		
060250	SFD 13S6-VV	3/4 ODF	5.25	4.00			
060262	SFD 13S7-VV	7/8 ODF	5.75	4.25	4.5		
056505	SFD 27S6-VV	3/4 ODF	7.00	5.75			
060251	SFD 27S7-VV	7/8 ODF	7.50	6.00			
060252	SFD 27S9-VV	1 1/8 ODF	7.63	5.81			
060253	SFD 54S11-VV	1 3/8 ODF	12.25	10.31	8.25	3.64	4.5
060254	SFD 54S13-VV	1 5/8 ODF	12.16	9.91			

Standard Product Offering