


# Cold Controls

MARS SERIES **260**

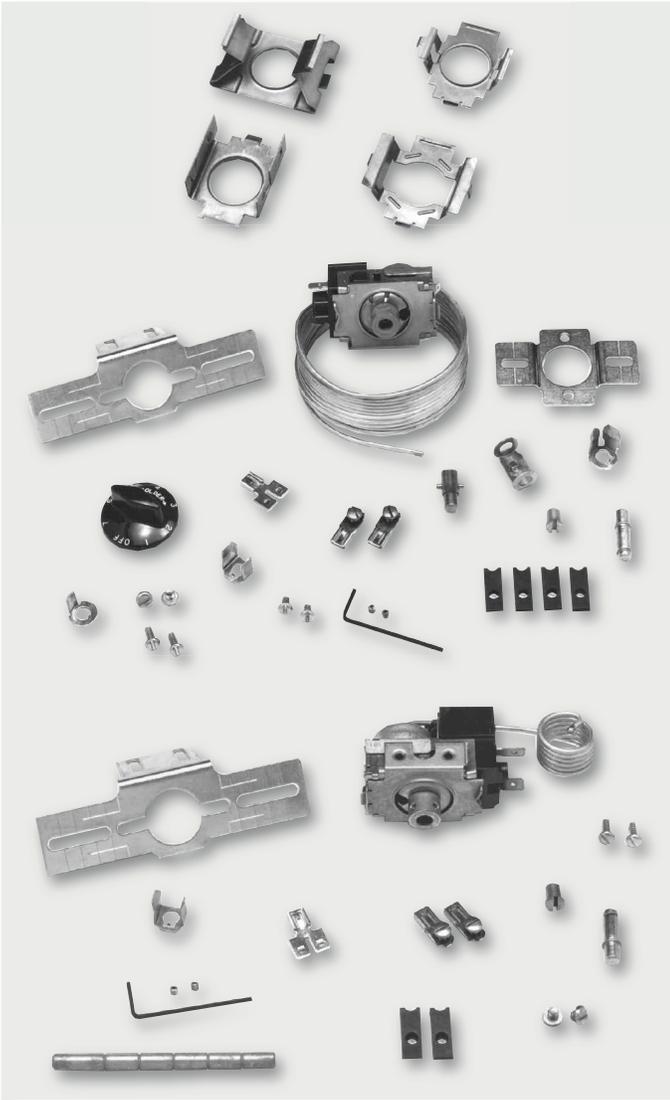

## MARS Super-Fit™ Universal Replacement Cold Controls

MARS Super-Fit™ cold controls are designed for the serviceman who wants to lower his inventory yet still have on hand the necessary controls to meet most replacement needs in the field. MARS Super-Fit™ cold controls are individually boxed with all necessary brackets and hardware to match almost any control mounting you're likely to find. And MARS Super-Fit™ cold controls come in a wide choice of temperature ranges and capillary lengths so you can make replacements that look and work like the original.


Save time and gasoline by keeping a selection of MARS Super-Fit™ cold controls on hand to finish the job on the *first* service call.

- Packed with mounting accessories and instructions
- Special brackets, shaft adaptors and fittings included where necessary
- UL and CSA approved

### Features:

- Wide selection, temperature ranges and capillary lengths
- Models for refrigerators, freezers, beverage coolers and room air conditioners
- Each control clearly labeled with all necessary information

**ELECTRICAL RATING:** 120 VAC—10 FLA, 60 LRA  
 (Applies to all controls except where noted) 240 VAC— 5 FLA, 30 LRA  
 Switch—SPST

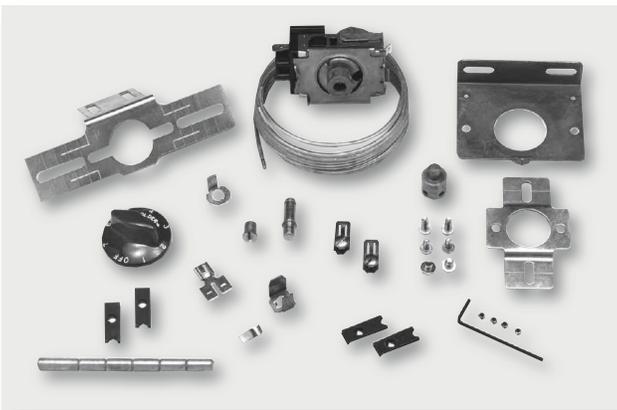

## Super-Fit™ Beverage Cooler Cold Controls—Constant Differential

MARS Super-Fit™ beverage cooler cold controls feature the same universal mounting capabilities found on all MARS Super-Fit™ cold controls. Temperature ranges and capillary lengths have been carefully selected for application on beverage, milk and water coolers. Individually boxed for protection, clearly labeled for accurate selection and complete with brackets, hardware and instructions.

| MARS NO. | WARM ON °F | ON °F | MID OFF °F | COLD OFF °F | CAP LENGTH |
|----------|------------|-------|------------|-------------|------------|
| 26274    | 52.0       | 39    | 17         | 2.0         | 78"        |
| 26273    | 56.4       | 36    | 24         | -5.0        | 78"        |
| 26272    | 65.5       | 47.5  | 41.5       | 24.5        | 78"        |