

## Pocket-Clip Screwdrivers

Includes core Plastic-Handle Screwdriver features plus:

- Specially designed for delicate instrument work




A116-3



Cat. No.	Tip Type	Shank Type	Shank Length	Overall Length
A130-2	1/8" (3.2 mm) Keystone	Round	2" (50.8 mm)	3.875" (98.4 mm)
A130-3	1/8" (3.2 mm) Keystone	Round	3" (76.2 mm)	4.875" (123.8 mm)
A116-2	3/32" (2.4 mm) Keystone	Round	2" (50.8 mm)	4.438" (112.7 mm)
A116-3	3/32" (2.4 mm) Keystone	Round	3" (76.2 mm)	5.438" (138.1 mm)
A131-2	1/8" (3.2 mm) Keystone	Round	2" (50.8 mm)	4.438" (112.7 mm)
P12	#0 Phillips	Round	2.5" (63.5 mm)	5" (127.0 mm)

## Magnetic Plastic-Handle Screwdriver

- Powerful magnet built into its shank to hold interchangeable bits and also screws
- Comfortable handle for easier driving
- Interchangeable bits store inside handle for quick access
- Wide selection of bits for different screw types

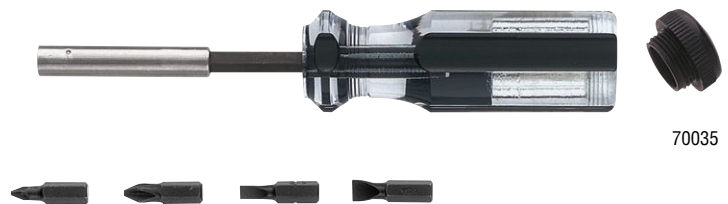

70035



Cat. No.	Phillips Bits	Slotted Bits	Shank Length	Handle Color	Overall Length
70035	#1, #2	3/16" (4.8 mm), 9/32" (7.1 mm)	3.75" (95.3 mm)	Black and Clear	3.438" (87.3 mm)

## Slotted Plastic-Handle Screw-Holding Screwdrivers

- Positive gripping action holds, starts, and drives slotted screws in awkward, hard-to-reach places
- Split-blade screw-holding driver wedges into screw slot
- Not designed for torquing or tightening



K36



Cat. No.	Tip Type	Shank Type	Overall Length	Slotted-Holding Screwdriver Set	
				SK234	3-Pc
K23	3/16" (4.8 mm) Slotted	Round	5.25" (133.4 mm)	●	—
K28	3/16" (4.8 mm) Slotted	Round	10.25" (260.4 mm)	—	—
K34‡	1/4" (6.4 mm) Slotted	Round	7.75" (196.9 mm)	●	—
K36‡	1/4" (6.4 mm) Slotted	Round	9.75" (247.7 mm)	—	—
K38‡	1/4" (6.4 mm) Slotted	Round	11.75" (298.5 mm)	—	—
K44	5/16" (7.9 mm) Slotted	Round	8.25" (209.6 mm)	—	—
K46	5/16" (7.9 mm) Slotted	Round	10.25" (260.4 mm)	●	—
K48	5/16" (7.9 mm) Slotted	Round	12.25" (311.2 mm)	—	—

‡ Blade thickness of 0.043" (1.09 mm) expanding to 0.085" (2.16 mm).  
K23 has pocket clips.

## Phillips-Tip Screw-Holding Screwdrivers

- Positive gripping action holds and starts Phillips screws in awkward, hard-to-reach places
- Blade separates to hold the fastener
- Not designed for torquing or tightening



K16



Cat. No.	Tip Type	Shank Type	Overall Length
K14	Phillips	Round	5" (127.0 mm)
K16	Phillips	Round	7" (177.8 mm)
K19	Phillips	Round	9" (228.6 mm)

