

Critical to HVACR systems.

Designed to filter and protect against moisture and debris.

- All-brass one-piece shell, significantly better than steel
- 700 PSIG working pressure
- May be silver brazed for permanent installation and protection of system
- Minimal space required for installation
- No paint to peel
- No rust or corrosion
- Single cartridge design
- Access valve (1/4" SAE) readily permits pressure drop readings
- Corrosion-resistant stainless steel bolts permit easy access for changing of cartridges
- No welds or solder joints, no chance of leaks!
- UL® and cUL Listed



A History of Quality and Innovation


For nearly a century, Superior has been the world's leading provider of HVACR valves and accessories.

Manufacturing Quality, Safety and Reliability

Superior HVACR products are designed to meet the highest standards, and only quality materials are used. Careful assembly and detailed inspection of every part ensures top performance and durability. Superior is fully certified to the stringent requirements of ISO 9001, which increase manufacturing efficiency and reliability.

Your Valve Partner

Our engineering team includes experts in product design and development as well as experts in the quality and compliance testing requirements needed to create custom valves to meet your unique applications. We know valves are a system-critical piece of your business and we're proud to provide you with American-made products and service you can trust.

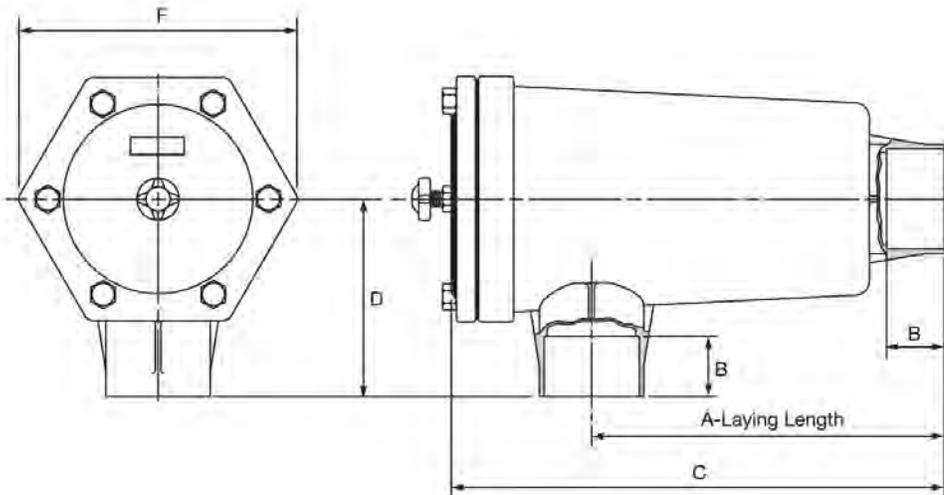

Part Number	Connection ODS	Bolt Torque (ft. lbs.)	Nominal Shell Dia. E (in.)	Dimensions (Inches)					UPC	Weight (lbs.)	Replacement Flange Gasket
				A	B	F	C	D			
Shells Only - Cartridges Not Included											
3CFA-18S	1 1/8	14	3	7.06	1.00	4.63	9.63	3.25	685768408130	8.20	AG3
3CFA-22S	1 3/8	14	3	7.19	1.13	4.63	9.75	3.38	685768408123	9.10	AG3
3CFA-26S	1 5/8	14	3	7.38	1.19	4.63	10.00	3.56	685768407447	8.80	AG3
3CFA-34S	2 1/8	14	3	7.63	1.31	4.63	10.19	3.81	685768408048	9.75	AG3
4CFA-26S	1 5/8	20	4	7.75	1.19	5.88	11.19	4.06	685768407935	13.20	AG4
4CFA-34S	2 1/8	20	4	8.00	1.31	5.88	11.38	4.31	685768408253	13.80	AG4
4CFA-42S	2 5/8	20	4	8.22	1.44	5.88	11.53	4.44	685768408031	14.20	AG4
5CFA-42S	2 5/8	35	5	8.88	1.44	7.25	12.69	4.88	685768408079	22.18	AG5
5CFA-50S	3 1/8	35	5	8.56	1.08	7.25	12.38	4.56	685768408086	21.40	AG5