


4D and 4R – Semi-Hermetic Compressors

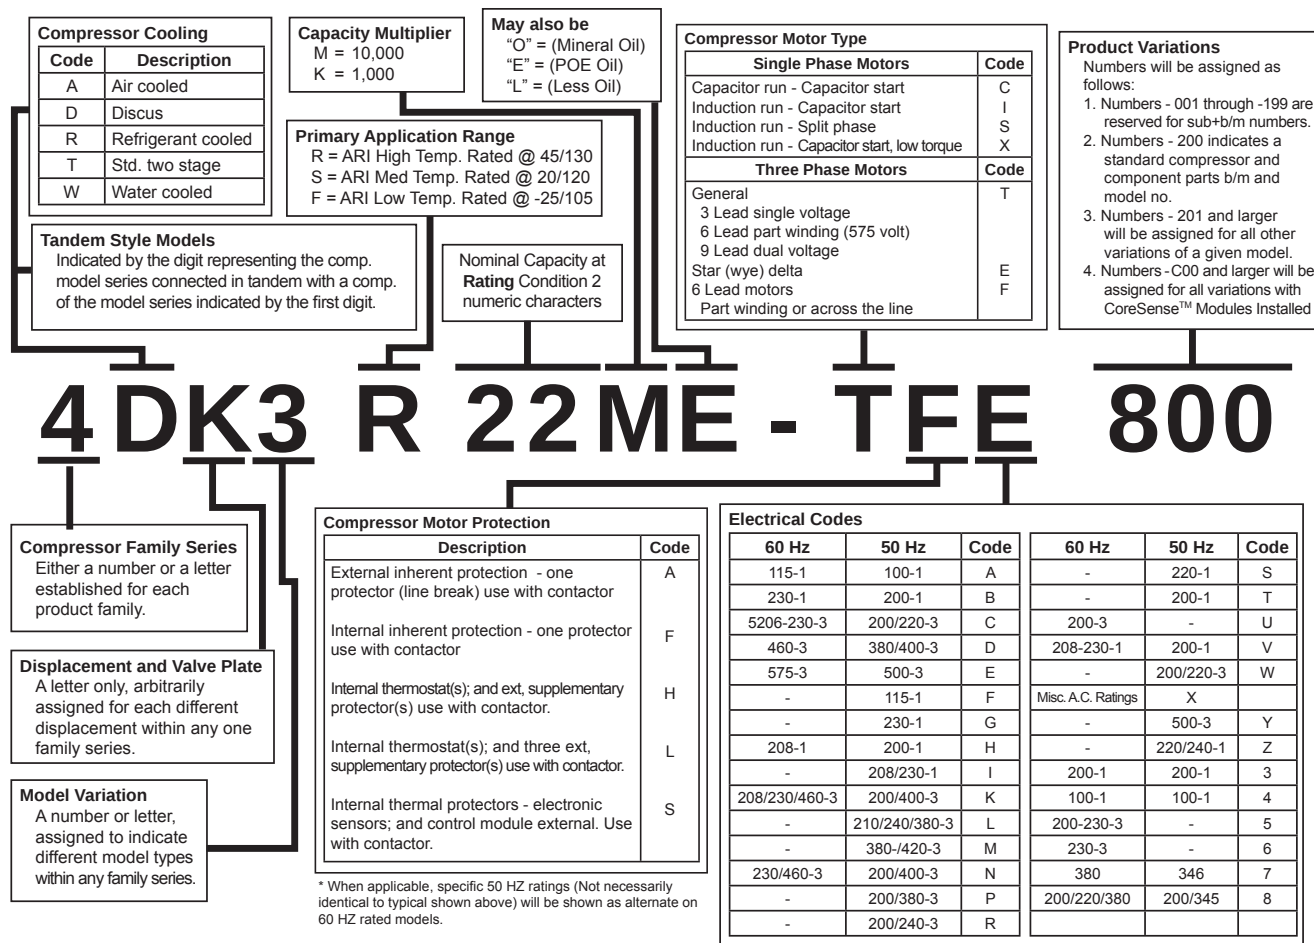

New Model Nomenclature (5th Digit = Application Rating)

R = Rating at +45°F to +130°F at 90°F Ambient Air

S = Rating at +20°F to +120°F at 90°F Ambient Air

F = Rating at -25°F to +105°F at 90° Ambient Air

Semi-Hermetic Compressors – 6D, 6R and 6T

Compressor Cooling

Code	Description
A	Air cooled
D	Discus
R	Refrigerant cooled
T	Std. two stage
W	Water cooled

Comp. Motor Rating Nominal

HP	Code	HP	Code	HP	Code
1/4	0025	2-3/4	0275	15	1500
1/3	0033	3 (0310)	0300	20	2000
1/2	0050	3-1/2	0350	25	2500
3/4	0075	4 (0406)	0400	30	3000
1	0100	5 (0506)	0500	35	3500
1-1/4	0125	6	0600	40	4000
1-1/2	0150	7-1/2 (0766)	0750	50	5000
1-3/4	0175	9	0900	60	6000
2	0200	10 (1015)	1000		
2-1/2	0250	12	1200		

May be = (-) or A

Note: Nominal horsepower rating of tandem compressors is sum of individual compressor ratings

Compressor Motor Type

Single Phase Motors	Code
Capacitor run - Capacitor start	C
Induction run - Capacitor start	I
Induction run - Split phase	S
Induction run - Capacitor start, low torque	X

Three Phase Motors	Code
General	T
3 Lead single voltage	
6 Lead part winding (575 volt)	
9 Lead dual voltage	
Star (wye) delta	
6 Lead motors	E
Part winding or across the line	F

Product Variations

Numbers will be assigned as follows:

- Numbers -001 through -199 are reserved for sub+b/m numbers.
- Numbers -200 indicates a standard compressor and component parts b/m and model no.
- Numbers -201 and larger will be assigned for all other variations of a given model.

6RN2 - 3000 - TSE 800

Compressor Family Series

Either a number or a letter established for each product family.

Displacement and Valve Plate

A letter only, arbitrarily assigned for each different displacement within any one family series.

Model Variation

A number or letter, assigned to indicate different model types within any family series.

May also be

"A" = (Alkylbenzene)
 "E" = (POE Oil)
 "L" = (Less Oil)

Compressor Motor Protection

Description	Code
External inherent protection - one protector (line break) use with contactor	A
Internal inherent protection - one protector use with contactor	F
Internal thermostat(s); and ext, supplementary protector(s) use with contactor.	H
Internal thermostat(s); and three ext, supplementary protector(s) use with contactor.	L
Internal thermal protectors - electronic sensors; and control module external. Use with contactor.	S
Internal thermal protectors - electronic sensors; and control module external. use with contactor (For European use only).	W


Electrical Codes

60 Hz	50 Hz	Code	60 Hz	50 Hz	Code
115-1	100-1	A	-	220-1	S
230-1	200-1	B	-	200-1	T
5206-230-3	200/220-3	C	200-3	-	U
460-3	380/400-3	D	208-230-1	200-1	V
575-3	500-3	E	-	200/220-3	W
-	115-1	F	Misc. A.C. Ratings	X	
-	230-1	G	-	500-3	Y
208-1	200-1	H	-	220/240-1	Z
-	208/230-1	I	200-1	200-1	3
208/230/460-3	200/400-3	K	100-1	100-1	4
-	210/240/380-3	L	200-230-3	-	5
-	380-/420-3	M	230-3	-	6
230/460-3	200/400-3	N	380	346	7
-	200/380-3	P	200/220/380	200/345	8
-	200/240-3	R			

* When applicable, specific 50 Hz ratings (Not necessarily identical to typical shown above) will be shown as alternate on 60 Hz rated models.



6D, 6R and 6T – Semi-Hermetic Compressors

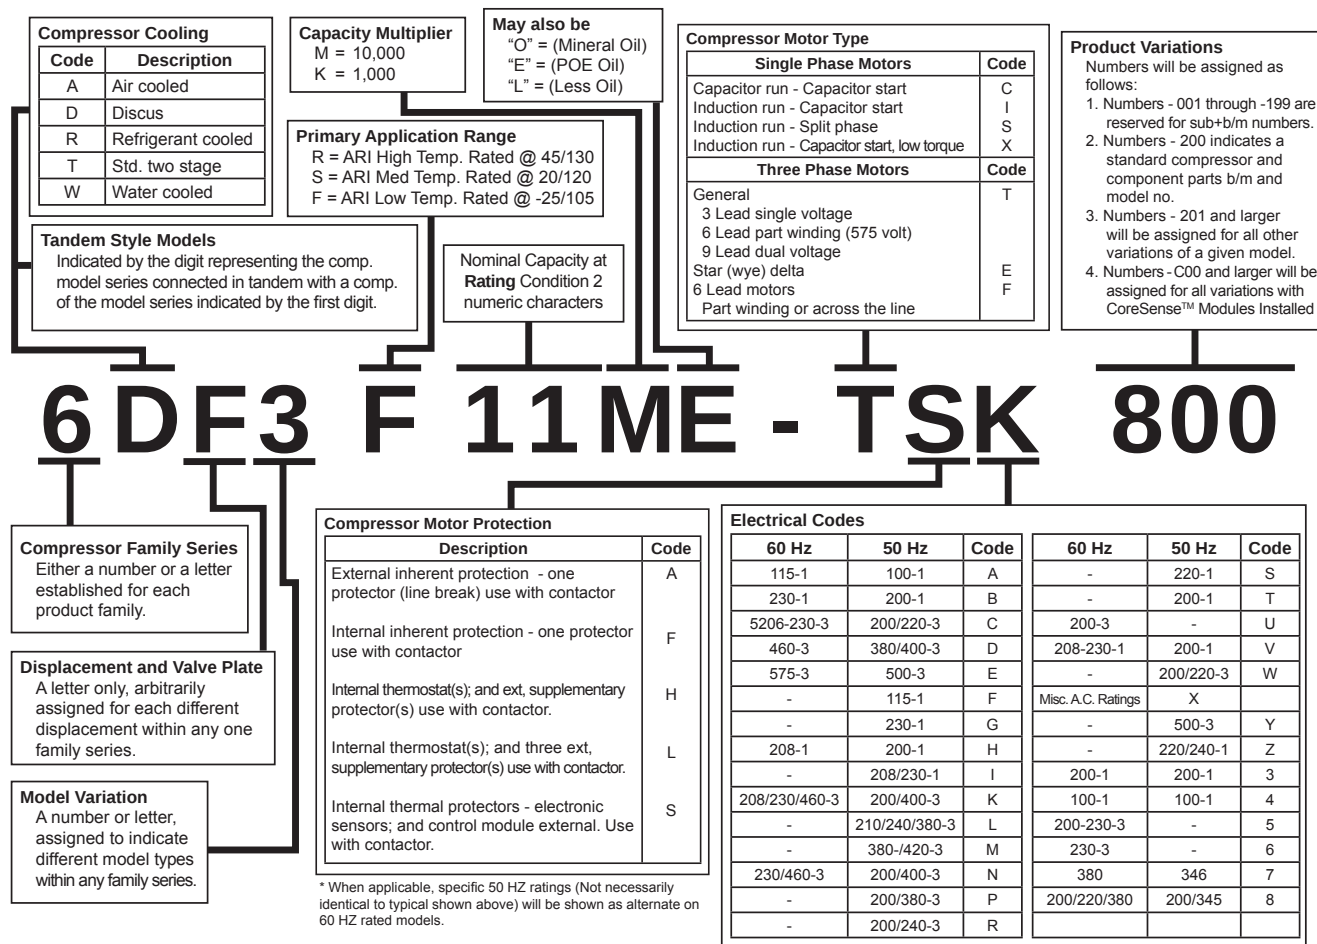

Unloader Valves and Coils	Part Number	Obsolete (Alco) Valve
Valve Less Coil	998-0212-00	
24 Volt Valve and Coil Kit	998-0212-01	
24 Volt Coil Only	023-0091-00	023-0039-09
120 Volt Valve and Coil Kit	998-0212-02	
120 Volt Coil Only	023-0091-01	023-0039-10
240 Volt Valve and Coil Kit	998-0212-03	
240 Volt Coil Only	023-0091-02	023-0039-11
Unloader Piston Kit	998-0130-00	

Semi-Hermetic Compressors – 6D, 6R and 6T

Common Replacement Parts

Common Parts	Part Number
Sight Glass Kit	998-0002-02
Sight Glass O-Ring	020-0844-05
Oil Screen Kit	998-0513-02
Magnetic Plug Gasket - 1" Internal Thread	020-0006-52
Magnetic Plug Gasket - 1 1/8" Internal Thread	020-0006-38
Oil Pump Kit	998-0008-33
Suction Strainer Assembly	548-0116-00
Terminal Jumpers/Extensions	521-0065-00
Gaskets	Part Number
Complete Gasket Set (Floating Reed)	998-1669-01
Complete Gasket Set (Delta Reed)	998-2669-01
Unloading Valve	020-0783-00
Housing Cover	020-0636-00
Stator Cover	020-0755-00
Bottom Plate	020-1265-00
Oil Pump	020-1267-00
Crankcase Heater (Flat Bottom Plate Models)	Part Number
120 Volt 100 Watt (US part# 918-0028-00)	518-0028-06
240 Volt 100 Watt (US part# 918-0028-01)	518-0028-07
Crankcase Heater Sleeve	030-0186-01
Crankcase Heater (Deep Sump Models)	Part Number
120V 200 Watt All 6DJ/R/S, 6DT/E/F & 6D*8	918-0518-00
240V 200 Watt All 6DJ/R/S, 6DT/E/F & 6D*8	918-0518-01
480V 200 Watt All 6DJ/R/S, 6DT/E/F & 6D*8	918-0518-02
CoreSense™ Parts	Part Number
CoreSense Module	943-0109-00
6R/6D CoreSense Wiring Harness	929-0098-00
CoreSense DLT Thermistor	985-0109-50
CoreSense Module Mounting Bracket/Stud Kit	974-1315-00
Sensor Only Kit	998-0162-01
Copper Gasket for Sensor	020-0297-13
O-Ring Gasket for Sensor	020-0003-28
Solid State Module	Part Number
24 Volt Module	998-0424-06
120/240 Volt Module	998-0524-10
Sensor Terminal Board	580-0054-00
Sentronic 3 Kits and Parts	Part Number
Complete Kit	585-1076-02
Sensor and Cable Kit	998-0162-00
Sensor Only Kit	998-0162-01
Copper Gasket for Sensor	020-0297-13
O-Ring Gasket for Sensor	020-0003-28

6D, 6R and 6T – Semi-Hermetic Compressors

Cooling Fan Kits

Cooling Fan Kits	Part Number	Used On
115 Volt Fan Motor Kit	998-0550-02	All 6D's & 6R's
115 Volt Replacement Fan Motor	998-0550-05	All 6D's & 6R's
230 Volt Fan Motor Kit	998-0550-00	All 6D's & 6R's
230 Volt Replacement Fan Motor	998-0550-03	All 6D's & 6R's
460 Volt Fan Motor Kit	998-0550-01	All 6D's & 6R's
460 Volt Replacement Fan Motor	998-0550-04	All 6D's & 6R's
Fan Mounting Kit	998-0574-04	6D*1 & 6R's (Small Head)
Fan Mounting Kit	998-0574-05	6RL's, 6RT's, 6DL1 & 6DT1
Fan Mounting Kit	998-0574-13	6D*3's Only
Fan Blade	083-0118-00	All 6D's & 6R's

Oil Screen Kits

Oil Screen Kits	Part Number	Used On
Oil Screen Kit	998-0513-02	All 6D's
Oil Screen Kit	998-0513-00	All 6R's & 6T's

Oil Cooler Kits

Oil Cooler Kits	Part Number	Used On
Oil Cooler Kit	998-1123-00	6RL/T & 6D*1 (Small Head)
Oil Cooler Kit	998-1126-00	6D*3's
Tee Fitting	036-0415-01	All 6D's & 6R's

Service Valves

Part #	Size	Discharge	Suction	Style	MTG Center	Thread
998-0510-46	1 3/8"	X		Rotalock		1 3/4"-12
998-0510-66	1 5/8"	X		Rotalock		1 3/4"-12
998-0510-11	1 3/8"		X	Bolt on (2)	2 1/4" x 2 1/4"	
998-0510-07	1 5/8"		X	Bolt on (4)	2 1/2" x 2 1/2"	
998-0510-20	2 1/8"		X	Bolt on (4)	3 1/16" x 3 1/16"	

Digital Compressor Parts	Part #
Valve Less Coil - 6D*D models	910-0111-00
24V Coil Only Kit	923-0084-00
120V Coil Only Kit	923-0084-01
240V Coil Only Kit	923-0084-02
Unloader Gasket	020-1369-01
IDCM Control Module	943-0194-00
Discharge Thermistor	985-0109-07
Unloader Piston Kit	998-0130-00

Semi-Hermetic Compressors – 6D, 6R and 6T

6D Floating Reed Models - Compressor Parts

Model	Valve Plate Kit	Unloader Valve Plate Kit	Cylinder Head Gasket	Unloader Cylinder Head Gasket	Valve Plate Gasket	Terminal Plate Group
	(998-)	(998-)	(020-)	(020-)	(020-)	(521-)
6DB3-3000-FSD	1661-27		0600-00		0664-03	0140-01
6DB3-3000-TSE	1661-27		0600-00		0664-03	0140-01
6DB3-3000-TSK	1661-27		0600-00		0664-03	0142-01
6DB3-300E-FSD	1661-27		0600-00		0664-03	0140-01
6DB3-300E-TSE	1661-27		0600-00		0664-03	0140-01
6DB3-300E-TSK	1661-27		0600-00		0664-03	0142-01
• 6DC1-2700-TSE	1661-26	1661-25	0600-00	0616-00	0664-03	0140-00
• 6DC1-2700-TSK	1661-26	1661-25	0600-00	0616-00	0664-03	0142-00
• 6DC3-2700-FSD	1661-26	1661-25	0600-00	0616-00	0664-03	0140-00
• 6DC3-2700-TSE	1661-26	1661-25	0600-00	0616-00	0664-03	0140-00
• 6DC3-2700-TSK	1661-26	1661-25	0600-00	0616-00	0664-03	0142-00
• 6DC3-270E-FSD	1661-26	1661-25	0600-00	0616-00	0664-03	0140-00
• 6DC3-270E-TSE	1661-26	1661-25	0600-00	0616-00	0664-03	0140-00
• 6DC3-270E-TSK	1661-26	1661-25	0600-00	0616-00	0664-03	0142-00
•• 6DD1-2700-FSD	1661-26	1661-25	0600-00	0616-00	0664-03	0140-00
•• 6DD1-2700-TSK	1661-26	1661-25	0600-00	0616-00	0664-03	0142-00
•• 6DD3-2700-FSD	1661-26	1661-25	0600-00	0616-00	0664-03	0140-00
•• 6DD3-2700-TSE	1661-26	1661-25	0600-00	0616-00	0664-03	0140-00
•• 6DD3-2700-TSK	1661-26	1661-25	0600-00	0616-00	0664-03	0142-00
•• 6DD3-270E-FSD	1661-26	1661-25	0600-00	0616-00	0664-03	0140-00
•• 6DD3-270E-TSE	1661-26	1661-25	0600-00	0616-00	0664-03	0140-00
•• 6DD3-270E-TSK	1661-26	1661-25	0600-00	0616-00	0664-03	0142-00
• 6DE1-3000-ES8	1661-26	1661-25	0600-00	0616-00	0664-05	0141-00
• 6DE1-3000-TSK	1661-26	1661-25	0600-00	0616-00	0664-05	0142-00
• 6DE3-3000-FSD	1661-26	1661-25	0600-00	0616-00	0664-05	0140-00
• 6DE3-3000-TSE	1661-26	1661-25	0600-00	0616-00	0664-05	0140-00

- 1 Bank Unloading
- 2 Banks Unloading

6D, 6R and 6T – Semi-Hermetic Compressors

6D Floating Reed Models - Compressor Parts

Model	Valve Plate Kit	Unloader Valve Plate Kit	Cylinder Head Gasket	Unloader Cylinder Head Gasket	Valve Plate Gasket	Terminal Plate Group
	(998-)	(998-)	(020-)	(020-)	(020-)	(521-)
• 6DE3-3000-TSK	1661-26	1661-25	0600-00	0616-00	0664-05	0142-00
• 6DE3-300E-FSD	1661-26	1661-25	0600-00	0616-00	0664-05	0140-00
• 6DE3-300E-TSE	1661-26	1661-25	0600-00	0616-00	0664-05	0140-00
• 6DE3-300E-TSK	1661-26	1661-25	0600-00	0616-00	0664-05	0142-00
•• 6DF1-3000-ES8	1661-26	1661-25	0600-00	0616-00	0664-05	0141-00
•• 6DF1-3000-FSD	1661-26	1661-25	0600-00	0616-00	0664-05	0140-00
•• 6DF1-3000-TSK	1661-26	1661-25	0600-00	0616-00	0664-05	0142-00
•• 6DF3-3000-FSD	1661-26	1661-25	0600-00	0616-00	0664-05	0140-00
•• 6DF3-3000-TSE	1661-26	1661-25	0600-00	0616-00	0664-05	0140-00
•• 6DF3-3000-TSK	1661-26	1661-25	0600-00	0616-00	0664-05	0142-00
•• 6DF3-300E-FSD	1661-26	1661-25	0600-00	0616-00	0664-05	0140-00
•• 6DF3-300E-TSE	1661-26	1661-25	0600-00	0616-00	0664-05	0140-00
•• 6DF3-300E-TSK	1661-26	1661-25	0600-00	0616-00	0664-05	0142-00
6DG3-3500-FSD	1661-27		0600-00		0664-15	0140-01
6DG3-3500-FSU	1661-27		0600-00		0664-15	0140-01
6DG3-3500-TSE	1661-27		0600-00		0664-15	0140-01
6DG3-3500-TSN	1661-27		0600-00		0664-15	0142-01
6DG3-350E-FSD	1661-27		0600-00		0664-15	0140-01
6DG3-350E-FSU	1661-27		0600-00		0664-15	0140-01
6DG3-350E-TSE	1661-27		0600-00		0664-15	0140-01
6DG3-350E-TSN	1661-27		0600-00		0664-15	0142-01
6DH1-2000-FSD	1661-26		0600-00		0664-03	0140-00
6DH1-2000-TSE	1661-26		0600-00		0664-03	0140-00
6DH1-2000-TSK	1661-26		0600-00		0664-03	0142-00
6DH1-3500-ES8	1661-27		0600-00		0664-03	0141-01
6DH1-3500-FSD	1661-27		0600-00		0664-03	0140-01
6DH1-3500-TSE	1661-27		0600-00		0664-03	0140-01
6DH1-3500-TSK	1661-27		0600-00		0664-03	0142-01
6DH3-200E-FSM	1661-26		0600-00		0664-03	0140-00
6DH3-200E-TSE	1661-26		0600-00		0664-03	0140-00
6DH3-200E-TSK	1661-26		0600-00		0664-03	0142-00
6DH3-3500-FSD	1661-27		0600-00		0664-03	0140-01
6DH3-3500-TSE	1661-27		0600-00		0664-03	0140-01
6DH3-3500-TSK	1661-27		0600-00		0664-03	0142-01

• 1 Bank Unloading
•• 2 Banks Unloading

Semi-Hermetic Compressors – 6D, 6R and 6T

6D Floating Reed Models - Compressor Parts

Model	Valve Plate Kit	Unloader Valve Plate Kit	Cylinder Head Gasket	Unloader Cylinder Head Gasket	Valve Plate Gasket	Terminal Plate Group
	(998-)	(998-)	(020-)	(020-)	(020-)	(521-)
6DH3-350E-FSD	1661-27		0600-00		0664-03	0140-01
6DH3-350E-TSE	1661-27		0600-00		0664-03	0140-01
6DH3-350E-TSK	1661-27		0600-00		0664-03	0142-01
6DJ1-4000-FSD	1661-27		0600-00		0644-05	0140-01
6DJ1-4000-FSU	1661-27		0600-00		0644-05	0140-01
6DJ1-4000-TSE	1661-27		0600-00		0644-05	0140-01
6DJ1-4000-TSN	1661-27		0600-00		0644-05	0142-01
6DJ3-300E-TSE	1661-27		0600-00		0644-05	0140-00
6DJ3-300E-TSK	1661-27		0600-00		0644-05	0142-00
6DJ3-4000-FSD	1661-27		0600-00		0644-05	0140-01
6DJ3-4000-FSU	1661-27		0600-00		0644-05	0140-01
6DJ3-4000-TSE	1661-27		0600-00		0644-05	0140-01
6DJ3-4000-TSN	1661-27		0600-00		0644-05	0142-01
6DJ3-400E-FSD	1661-27		0600-00		0644-05	0140-01
6DJ3-400E-FSU	1661-27		0600-00		0644-05	0140-01
6DJ3-400E-TSE	1661-27		0600-00		0644-05	0140-01
6DJ3-400E-TSN	1661-27		0600-00		0644-05	0142-01
• 6DK1-2000-TSK	1661-27	1661-25	0600-00	0616-00	0664-03	0142-00
• 6DK1-3500-FSD	1661-27	1661-28	0600-00	0616-00	0664-03	0140-01
• 6DK1-3500-TSE	1661-27	1661-28	0600-00	0616-00	0664-03	0140-01
• 6DK1-3500-TSK	1661-27	1661-28	0600-00	0616-00	0664-03	0142-01
• 6DK1-350E-TSK	1661-27	1661-28	0600-00	0616-00	0664-03	0142-01
• 6DK3-200E-FSM	1661-26	1661-25	0600-00	0616-00	0664-03	0140-00
• 6DK3-200E-TSE	1661-26	1661-25	0600-00	0616-00	0664-03	0140-00
• 6DK3-200E-TSK	1661-26	1661-25	0600-00	0616-00	0664-03	0142-00
• 6DK3-3500-FSD	1661-27	1661-28	0600-00	0616-00	0664-03	0140-01
• 6DK3-3500-TSE	1661-27	1661-28	0600-00	0616-00	0664-03	0140-01
• 6DK3-3500-TSK	1661-27	1661-28	0600-00	0616-00	0664-03	0142-01
• 6DK3-350E-FSD	1661-27	1661-28	0600-00	0616-00	0664-03	0140-01
• 6DK3-350E-TSE	1661-27	1661-28	0600-00	0616-00	0664-03	0140-01
• 6DK3-350E-TSK	1661-27	1661-28	0600-00	0616-00	0664-03	0142-01
6DL1-2700-FSD	1661-26	1661-25	0600-00	0616-00	0664-03	0140-00
6DL1-2700-TSE	1661-26	1661-25	0600-00	0616-00	0664-03	0140-00
6DL1-2700-TSK	1661-26	1661-25	0600-00	0616-00	0664-03	0142-00

- 1 Bank Unloading
- 2 Banks Unloading

6D, 6R and 6T – Semi-Hermetic Compressors

6D Floating Reed Models - Compressor Parts

Model	Valve Plate Kit	Unloader Valve Plate Kit	Cylinder Head Gasket	Unloader Cylinder Head Gasket	Valve Plate Gasket	Terminal Plate Group
	(998-)	(998-)	(020-)	(020-)	(020-)	(521-)
6DL3-2700-FSD	1661-26	1661-25	0600-00	0616-00	0664-03	0140-00
6DL3-2700-TSE	1661-26	1661-25	0600-00	0616-00	0664-03	0140-00
6DL3-2700-TSK	1661-26	1661-25	0600-00	0616-00	0664-03	0142-00
6DL3-270E-FSD	1661-26	1661-25	0600-00	0616-00	0664-03	0140-00
6DL3-270E-TSE	1661-26	1661-25	0600-00	0616-00	0664-03	0140-00
6DL3-270E-TSK	1661-26	1661-25	0600-00	0616-00	0664-03	0142-00
• 6DM3-3500-FSD	1661-27	1661-28	0600-00	0616-00	0664-15	0140-01
• 6DM3-3500-FSU	1661-27	1661-28	0600-00	0616-00	0664-15	0140-01
• 6DM3-3500-TSE	1661-27	1661-28	0600-00	0616-00	0664-15	0140-01
• 6DM3-3500-TSN	1661-27	1661-28	0600-00	0616-00	0664-15	0142-01
• 6DM3-350E-FSD	1661-27	1661-28	0600-00	0616-00	0664-15	0140-01
• 6DM3-350E-FSU	1661-27	1661-28	0600-00	0616-00	0664-15	0140-01
• 6DM3-350E-TSE	1661-27	1661-28	0600-00	0616-00	0664-15	0140-01
• 6DM3-350E-TSN	1661-27	1661-28	0600-00	0616-00	0664-15	0142-01
•• 6DN3-3500-ES8	1661-27	1661-28	0600-00	0616-00	0664-15	0141-01
•• 6DN3-3500-FSD	1661-27	1661-28	0600-00	0616-00	0664-15	0140-01
•• 6DN3-3500-FSU	1661-27	1661-28	0600-00	0616-00	0664-15	0140-01
•• 6DN3-3500-TSE	1661-27	1661-28	0600-00	0616-00	0664-15	0140-01
•• 6DN3-3500-TSN	1661-27	1661-28	0600-00	0616-00	0664-15	0142-01
•• 6DN3-350E-FSD	1661-27	1661-28	0600-00	0616-00	0664-15	0140-01
•• 6DN3-350E-FSU	1661-27	1661-28	0600-00	0616-00	0664-15	0140-01
•• 6DN3-350E-TSE	1661-27	1661-28	0600-00	0616-00	0664-15	0140-01
•• 6DN3-350E-TSN	1661-27	1661-28	0600-00	0616-00	0664-15	0142-01
•• 6DP1-2000-TSK	1661-27	1661-28	0600-00	0616-00	0664-03	0142-00
•• 6DP1-3500-FSD	1661-27	1661-28	0600-00	0616-00	0664-03	0140-01
•• 6DP1-3500-TSE	1661-27	1661-28	0600-00	0616-00	0664-03	0140-01
•• 6DP1-3500-TSK	1661-27	1661-28	0600-00	0616-00	0664-03	0141-01
•• 6DP1-350E-TSK	1661-27	1661-28	0600-00	0616-00	0664-03	0141-01
•• 6DP3-200E-FSM	1661-26	1661-28	0600-00	0616-00	0664-03	0140-00
•• 6DP3-200E-TSE	1661-27	1661-28	0600-00	0616-00	0664-03	0140-00
•• 6DP3-200E-TSK	1661-27	1661-28	0600-00	0616-00	0664-03	0142-00
•• 6DP3-3500-FSD	1661-27	1661-28	0600-00	0616-00	0664-03	0140-01
•• 6DP3-3500-TSE	1661-27	1661-28	0600-00	0616-00	0664-03	0140-01
•• 6DP3-3500-TSK	1661-27	1661-28	0600-00	0616-00	0664-03	0142-01
• 1 Bank Unloading						
•• 2 Banks Unloading						

Semi-Hermetic Compressors – 6D, 6R and 6T

6D Floating Reed Models - Compressor Parts

Model	Valve Plate Kit	Unloader Valve Plate Kit	Cylinder Head Gasket	Unloader Cylinder Head Gasket	Valve Plate Gasket	Terminal Plate Group
	(998-)	(998-)	(020-)	(020-)	(020-)	(521-)
•• 6DP3-350E-FSD	1661-27	1661-28	0600-00	0616-00	0664-03	0140-01
•• 6DP3-350E-TSE	1661-27	1661-28	0600-00	0616-00	0664-03	0140-01
•• 6DP3-350E-TSK	1661-27	1661-28	0600-00	0616-00	0664-03	0142-01
• 6DR1-4000-FSD	1661-27	1661-28	0600-00	0616-00	0664-05	0140-01
• 6DR1-4000-FSU	1661-27	1661-28	0600-00	0616-00	0664-05	0140-01
• 6DR1-4000-TSE	1661-27	1661-28	0600-00	0616-00	0664-05	0140-01
• 6DR1-4000-TSN	1661-27	1661-28	0600-00	0616-00	0664-05	0142-01
• 6DR3-300E-TSE	1661-27	1661-28	0600-00	0616-00	0664-05	0140-01
• 6DR3-300E-TSK	1661-27	1661-28	0600-00	0616-00	0664-05	0142-01
• 6DR3-4000-FSD	1661-27	1661-28	0600-00	0616-00	0664-05	0140-01
• 6DR3-4000-FSU	1661-27	1661-28	0600-00	0616-00	0664-05	0140-01
• 6DR3-4000-TSE	1661-27	1661-28	0600-00	0616-00	0664-05	0140-01
• 6DR3-4000-TSN	1661-27	1661-28	0600-00	0616-00	0664-05	0142-01
• 6DR3-400E-FSD	1661-27	1661-28	0600-00	0616-00	0664-05	0140-01
• 6DR3-400E-FSU	1661-27	1661-28	0600-00	0616-00	0664-05	0140-01
• 6DR3-400E-TSE	1661-27	1661-28	0600-00	0616-00	0664-05	0140-01
• 6DR3-400E-TSN	1661-27	1661-28	0600-00	0616-00	0664-05	0142-01
•• 6DS1-4000-ES8	1661-27	1661-28	0600-00	0616-00	0664-05	0141-01
•• 6DS1-4000-FSD	1661-27	1661-28	0600-00	0616-00	0664-05	0140-01
•• 6DS1-4000-FSU	1661-27	1661-28	0600-00	0616-00	0664-05	0140-01
•• 6DS1-4000-TSE	1661-27	1661-28	0600-00	0616-00	0664-05	0140-01
•• 6DS1-4000-TSN	1661-27	1661-28	0600-00	0616-00	0664-05	0142-01
•• 6DS3-300E-TSE	1661-27	1661-28	0600-00	0616-00	0664-05	0140-00
•• 6DS3-300E-TSK	1661-27	1661-28	0600-00	0616-00	0664-05	0142-00
•• 6DS3-4000-FSD	1661-27	1661-28	0600-00	0616-00	0664-05	0140-01
•• 6DS3-4000-FSU	1661-27	1661-28	0600-00	0616-00	0664-05	0140-01
•• 6DS3-4000-TSE	1661-27	1661-28	0600-00	0616-00	0664-05	0140-01
•• 6DS3-4000-TSN	1661-27	1661-28	0600-00	0616-00	0664-05	0142-01
•• 6DS3-400E-FSD	1661-27	1661-28	0600-00	0616-00	0664-05	0140-01
•• 6DS3-400E-FSU	1661-27	1661-28	0600-00	0616-00	0664-05	0140-01
•• 6DS3-400E-TSE	1661-27	1661-28	0600-00	0616-00	0664-05	0140-01
•• 6DS3-400E-TSN	1661-27	1661-28	0600-00	0616-00	0664-05	0140-01
6DT1-3000-ES8	1661-26		0600-00		0664-05	0141-00
6DT1-3000-FSD	1661-26		0600-00		0664-05	0140-00

• 1 Bank Unloading
•• 2 Banks Unloading

6D, 6R and 6T – Semi-Hermetic Compressors

6D Floating Reed Models - Compressor Parts

Model	Valve Plate Kit	Unloader Valve Plate Kit	Cylinder Head Gasket	Unloader Cylinder Head Gasket	Valve Plate Gasket	Terminal Plate Group
	(998-)	(998-)	(020-)	(020-)	(020-)	(521-)
6DT1-3000-TSE	1661-26		0600-00		0664-05	0140-00
6DT1-3000-TSK	1661-26		0600-00		0664-05	0142-00
6DT3-3000-FSD	1661-26		0600-00		0664-05	0140-00
6DT3-3000-TSE	1661-26		0600-00		0664-05	0140-00
6DT3-3000-TSK	1661-26		0600-00		0664-05	0142-00
6DT3-300E-FSD	1661-26		0600-00		0664-05	0140-00
6DT3-300E-TSE	1661-26		0600-00		0664-05	0140-00
6DT3-300E-TSK	1661-26		0600-00		0664-05	0142-00
• 6DW3-3000-FSD	1661-27	1661-28	0600-00	0616-00	0664-03	0140-01
• 6DW3-3000-TSE	1661-27	1661-28	0600-00	0616-00	0664-03	0140-01
• 6DW3-3000-TSK	1661-27	1661-28	0600-00	0616-00	0664-03	0142-01
• 6DW3-300E-FSD	1661-27	1661-28	0600-00	0616-00	0664-03	0140-01
• 6DW3-300E-TSE	1661-27	1661-28	0600-00	0616-00	0664-03	0140-01
• 6DW3-300E-TSK	1661-27	1661-28	0600-00	0616-00	0664-03	0142-01
•• 6DY3-3000-FSD	1661-27	1661-28	0600-00	0616-00	0664-03	0140-01
•• 6DY3-3000-TSE	1661-27	1661-28	0600-00	0616-00	0664-03	0140-01
•• 6DY3-3000-TSK	1661-27	1661-28	0600-00	0616-00	0664-03	0142-01
•• 6DY3-300E-FSD	1661-27	1661-28	0600-00	0616-00	0664-03	0140-01
•• 6DY3-300E-TSE	1661-27	1661-28	0600-00	0616-00	0664-03	0140-01
•• 6DY3-300E-TSK	1661-27	1661-28	0600-00	0616-00	0664-03	0142-01

- 1 Bank Unloading
- 2 Banks Unloading

Semi-Hermetic Compressors – 6D, 6R and 6T

6D Delta Reed Models - Compressor Parts

Model (Horse Power Nomenclature)	New Model (BTU Nomenclature)	Delta Valve Plate Kit	Unloader Valve Plate Kit	Cylinder Head Gasket	Unloader Cylinder Head Gasket	Valve Plate Gasket	Terminal Plate Group
		(998-)	(998-)	(020-)	(020-)	(020-)	(521-)
6DB3A3000-FSD	6DB3R32M0-FSD	2661-27		0600-00		1235-01	0140-01
6DB3A3000-TSE	6DB3R32M0-TSE	2661-27		0600-00		1235-01	0140-01
6DB3A3000-TSK	6DB3R32M0-TSK	2661-27		0600-00		1235-01	0142-01
6DB3A300E-FSD	6DB3R32ME-FSD	2661-27		0600-00		1235-01	0140-01
6DB3A300E-TSE	6DB3R32ME-TSE	2661-27		0600-00		1235-01	0140-01
6DB3A300E-TSK	6DB3R32ME-TSK	2661-27		0600-00		1235-01	0142-01
• 6DC1A2700-TSE	N/A	2661-26	2661-25	0600-00	0616-00	1235-01	0140-00
• 6DC1A2700-TSK	N/A	2661-26	2661-25	0600-00	0616-00	1235-01	0142-00
• 6DC3A2700-ES8	N/A	2661-26	2661-25	0600-00	0616-00	1235-01	0141-00
• 6DC3A2700-FSD	6DC3F93K0-FSD	2661-26	2661-25	0600-00	0616-00	1235-01	0140-00
• 6DC3A2700-TSE	6DC3F93K0-TSE	2661-26	2661-25	0600-00	0616-00	1235-01	0140-00
• 6DC3A2700-TSK	6DC3F93K0-TSK	2661-26	2661-25	0600-00	0616-00	1235-01	0142-00
• 6DC3A270E-FSD	6DC3F93KE-FSD	2661-26	2661-25	0600-00	0616-00	1235-01	0140-00
• 6DC3A270E-TSE	6DC3F93KE-TSE	2661-26	2661-25	0600-00	0616-00	1235-01	0140-00
• 6DC3A270E-TSK	6DC3F93KE-TSK	2661-26	2661-25	0600-00	0616-00	1235-01	0142-00
•• 6DD1A2700-FSD	N/A	2661-26	2661-25	0600-00	0616-00	1235-01	0140-00
•• 6DD1A2700-TSK	N/A	2661-26	2661-25	0600-00	0616-00	1235-01	0142-00
•• 6DD3A2700-ES8	N/A	2661-26	2661-25	0600-00	0616-00	1235-01	0141-00
•• 6DD3A2700-FSD	6DD3F93K0-FSD	2661-26	2661-25	0600-00	0616-00	1235-01	0140-00
•• 6DD3A2700-TSE	6DD3F93K0-TSE	2661-26	2661-25	0600-00	0616-00	1235-01	0140-00
•• 6DD3A2700-TSK	6DD3F93K0-TSK	2661-26	2661-25	0600-00	0616-00	1235-01	0142-00
•• 6DD3A270E-FSD	6DD3F93KE-FSD	2661-26	2661-25	0600-00	0616-00	1235-01	0140-00
•• 6DD3A270E-TSE	6DD3F93KE-TSE	2661-26	2661-25	0600-00	0616-00	1235-01	0140-00
•• 6DD3A270E-TSK	6DD3F93KE-TSK	2661-26	2661-25	0600-00	0616-00	1235-01	0142-00
• 6DE1A3000-ES8	N/A	2661-26	2661-25	0600-00	0616-00	1235-03	0141-00
• 6DE1A3000-TSK	N/A	2661-26	2661-25	0600-00	0616-00	1235-03	0142-00
• 6DE3A3000-FSD	6DE3F11M0-FSD	2661-26	2661-25	0600-00	0616-00	1235-03	0140-00
• 6DE3A3000-TSE	6DE3F11M0-TSE	2661-26	2661-25	0600-00	0616-00	1235-03	0140-00
• 6DE3A3000-TSK	6DE3F11M0-TSK	2661-26	2661-25	0600-00	0616-00	1235-03	0142-00
• 6DE3A300E-FSD	6DE3F11ME-FSD	2661-26	2661-25	0600-00	0616-00	1235-03	0140-00
• 6DE3A300E-TSE	6DE3F11ME-TSE	2661-26	2661-25	0600-00	0616-00	1235-03	0140-00
• 6DE3A300E-TSK	6DE3F11ME-TSK	2661-26	2661-25	0600-00	0616-00	1235-03	0142-00
•• 6DF1A3000-ES8	N/A	2661-26	2661-25	0600-00	0616-00	1235-03	0141-00
•• 6DF1A3000-FSD	N/A	2661-26	2661-25	0600-00	0616-00	1235-03	0140-00
•• 6DF1A3000-TSK	N/A	2661-26	2661-25	0600-00	0616-00	1235-03	0142-00
•• 6DF3A3000-FSD	6DF3F11M0-FSD	2661-26	2661-25	0600-00	0616-00	1235-03	0140-00

New Model Nomenclature (5th Digit = Application Rating)

R = Rating at +45°F to +130°F at 90°F Ambient Air

S = Rating at +20°F to +120°F at 90°F Ambient Air

F = Rating at -25°F to +105°F at 90° Ambient Air

- 1 Bank Unloading
- 2 Banks Unloading

6D, 6R and 6T – Semi-Hermetic Compressors

6D Delta Reed Models - Compressor Parts

Model (Horse Power Nomenclature)	New Model (BTU Nomenclature)	Delta Valve Plate Kit	Unloader Valve Plate Kit	Cylinder Head Gasket	Unloader Cylinder Head Gasket	Valve Plate Gasket	Terminal Plate Group
		(998-)	(998-)	(020-)	(020-)	(020-)	(521-)
•• 6DF3A3000-TSE	6DF3F11M0-TSE	2661-26	2661-25	0600-00	0616-00	1235-03	0140-00
•• 6DF3A3000-TSK	6DF3F11M0-TSK	2661-26	2661-25	0600-00	0616-00	1235-03	0142-00
•• 6DF3A300E-FSD	6DF3F11ME-FSD	2661-26	2661-25	0600-00	0616-00	1235-03	0140-00
•• 6DF3A300E-TSE	6DF3F11ME-TSE	2661-26	2661-25	0600-00	0616-00	1235-03	0140-00
•• 6DF3A300E-TSK	6DF3F11ME-TSK	2661-26	2661-25	0600-00	0616-00	1235-03	0142-00
6DG3A3500-FSD	6DG3R37M0-FSD	2661-27		0600-00		1235-07	0140-01
6DG3A3500-FSU	6DG3R37M0-FSU	2661-27		0600-00		1235-07	0140-01
6DG3A3500-TSE	6DG3R37M0-TSE	2661-27		0600-00		1235-07	0140-01
6DG3A3500-TSN	6DG3R37M0-TSN	2661-27		0600-00		1235-07	0142-01
6DG3A350E-FSD	6DG3R37ME-FSD	2661-27		0600-00		1235-07	0140-01
6DG3A350E-FSU	6DG3R37ME-FSU	2661-27		0600-00		1235-07	0140-01
6DG3A350E-TSE	6DG3R37ME-TSE	2661-27		0600-00		1235-07	0140-01
6DG3A350E-TSN	6DG3R37ME-TSN	2661-27		0600-00		1235-07	0142-01
6DH1A2000-FSD	N/A	2661-26		0600-00		1235-01	0140-00
6DH1A2000-TSE	N/A	2661-26		0600-00		1235-01	0140-00
6DH1A2000-TSK	N/A	2661-26		0600-00		1235-01	0142-00
6DH1A3500-FSD	6DH1R35M0-FSD	2661-27		0600-00		1235-01	0140-01
6DH1A3500-TSE	6DH1R35M0-TSE	2661-27		0600-00		1235-01	0140-01
6DH1A3500-TSK	6DH1R35M0-TSK	2661-27		0600-00		1235-01	0142-01
6DH3A200E-FSM	6DH3R23ME-FSM	2661-26		0600-00		1235-01	0140-00
6DH3A200E-TSE	6DH3R23ME-TSE	2661-26		0600-00		1235-01	0140-00
6DH3A200E-TSK	6DH3R23ME-TSK	2661-26		0600-00		1235-01	0142-00
6DH3A3500-FSD	6DH3R35M0-FSD	2661-27		0600-00		1235-01	0140-01
6DH3A3500-TSE	6DH3R35M0-TSE	2661-27		0600-00		1235-01	0140-01
6DH3A3500-TSK	6DH3R35M0-TSK	2661-27		0600-00		1235-01	0142-01
6DH3A350E-FSD	6DH3R35ME-FSD	2661-27		0600-00		1235-01	0140-01
6DH3A350E-TSE	6DH3R35ME-TSE	2661-27		0600-00		1235-01	0140-01
6DH3A350E-TSK	6DH3R35ME-TSK	2661-27		0600-00		1235-01	0142-01
6DJ1A4000-FSD	6DJ1R40M0-FSD	2661-27		0600-00		1235-03	0140-01
6DJ1A4000-FSU	6DJ1R40M0-FSU	2661-27		0600-00		1235-03	0140-01
6DJ1A4000-TSE	6DJ1R40M0-TSE	2661-27		0600-00		1235-03	0140-01
6DJ1A4000-TSN	6DJ1R40M0-TSN	2661-27		0600-00		1235-03	0142-01
6DJ3A300E-TSE	6DJ3R28ME-TSE	2661-27		0600-00		1235-03	0140-00
6DJ3A300E-TSK	6DJ3R28ME-TSK	2661-27		0600-00		1235-03	0142-00
6DJ3A4000-FSD	6DJ3R40M0-FSD	2661-27		0600-00		1235-03	0140-01
6DJ3A4000-FSU	6DJ3R40M0-FSU	2661-27		0600-00		1235-03	0140-01

New Model Nomenclature (5th Digit = Application Rating)

R = Rating at +45°F to +130°F at 90°F Ambient Air

S = Rating at +20°F to +120°F at 90°F Ambient Air

F = Rating at -25°F to +105°F at 90° Ambient Air

- 1 Bank Unloading
- 2 Banks Unloading

Semi-Hermetic Compressors – 6D, 6R and 6T

6D Delta Reed Models - Compressor Parts

Model (Horse Power Nomenclature)	New Model (BTU Nomenclature)	Delta Valve Plate Kit	Unloader Valve Plate Kit	Cylinder Head Gasket	Unloader Cylinder Head Gasket	Valve Plate Gasket	Terminal Plate Group
		(998-)	(998-)	(020-)	(020-)	(020-)	(521-)
6DJ3A4000-TSE	6DJ3R40M0-TSE	2661-27		0600-00		1235-03	0140-01
6DJ3A4000-TSN	6DJ3R40M0-TSN	2661-27		0600-00		1235-03	0142-01
6DJ3A400E-FSD	6DJ3R40ME-FSD	2661-27		0600-00		1235-03	0140-01
6DJ3A400E-FSU	6DJ3R40ME-FSU	2661-27		0600-00		1235-03	0140-01
6DJ3A400E-TSE	6DJ3R40ME-TSE	2661-27		0600-00		1235-03	0140-01
6DJ3A400E-TSN	6DJ3R40ME-TSN	2661-27		0600-00		1235-03	0142-01
• 6DK1A2000-TSK	N/A	2661-27	2661-25	0600-00	0616-00	1235-01	0142-00
• 6DK1A3500-ES8	6DK1R35M0-ES8	2661-27	2661-28	0600-00	0616-00	1235-01	0141-01
• 6DK1A3500-FSD	6DK1R35M0-FSD	2661-27	2661-28	0600-00	0616-00	1235-01	0140-01
• 6DK1A3500-TSE	6DK1R35M0-TSE	2661-27	2661-28	0600-00	0616-00	1235-01	0140-01
• 6DK1A3500-TSK	6DK1R35M0-TSK	2661-27	2661-28	0600-00	0616-00	1235-01	0142-01
• 6DK1A350E-TSK	6DK1R35ME-TSK	2661-27	2661-28	0600-00	0616-00	1235-01	0142-01
• 6DK3A200E-FSM	6DK3R23ME-FSM	2661-26	2661-25	0600-00	0616-00	1235-01	0140-00
• 6DK3A200E-TSE	6DK3R23ME-TSE	2661-26	2661-25	0600-00	0616-00	1235-01	0140-00
• 6DK3A200E-TSK	6DK3R23ME-TSK	2661-26	2661-25	0600-00	0616-00	1235-01	0142-00
• 6DK3A3500-FSD	6DK3R35M0-FSD	2661-27	2661-28	0600-00	0616-00	1235-01	0140-01
• 6DK3A3500-TSE	6DK3R35M0-TSE	2661-27	2661-28	0600-00	0616-00	1235-01	0140-01
• 6DK3A3500-TSK	6DK3R35M0-TSK	2661-27	2661-28	0600-00	0616-00	1235-01	0142-01
• 6DK3A350E-FSD	6DK3R35ME-FSD	2661-27	2661-28	0600-00	0616-00	1235-01	0140-01
• 6DK3A350E-TSE	6DK3R35ME-TSE	2661-27	2661-28	0600-00	0616-00	1235-01	0140-01
• 6DK3A350E-TSK	6DK3R35ME-TSK	2661-27	2661-28	0600-00	0616-00	1235-01	0142-01
6DL1A2700-FSD	N/A	2661-26	2661-25	0600-00	0616-00	1235-01	0140-00
6DL1A2700-TSE	N/A	2661-26	2661-25	0600-00	0616-00	1235-01	0140-00
6DL1A2700-TSK	N/A	2661-26	2661-25	0600-00	0616-00	1235-01	0142-00
6DL3A2700-ES8	N/A	2661-26	2661-25	0600-00	0616-00	1235-01	0141-00
6DL3A2700-FSD	6DL3F93K0-FSD	2661-26	2661-25	0600-00	0616-00	1235-01	0140-00
6DL3A2700-TSE	6DL3F93K0-TSE	2661-26	2661-25	0600-00	0616-00	1235-01	0140-00
6DL3A2700-TSK	6DL3F93K0-TSK	2661-26	2661-25	0600-00	0616-00	1235-01	0142-00
6DL3A270E-FSD	6DL3F93KE-FSD	2661-26	2661-25	0600-00	0616-00	1235-01	0140-00
6DL3A270E-TSE	6DL3F93KE-TSE	2661-26	2661-25	0600-00	0616-00	1235-01	0140-00
6DL3A270E-TSK	6DL3F93KE-TSK	2661-26	2661-25	0600-00	0616-00	1235-01	0142-00
• 6DM3A3500-FSD	6DM3R37M0-FSD	2661-27	2661-28	0600-00	0616-00	1235-07	0140-01
• 6DM3A3500-FSU	6DM3R37M0-FSU	2661-27	2661-28	0600-00	0616-00	1235-07	0140-01
• 6DM3A3500-TSE	6DM3R37M0-TSE	2661-27	2661-28	0600-00	0616-00	1235-07	0140-01
• 6DM3A3500-TSN	6DM3R37M0-TSN	2661-27	2661-28	0600-00	0616-00	1235-07	0142-01
• 6DM3A350E-FSD	6DM3R37ME-FSD	2661-27	2661-28	0600-00	0616-00	1235-07	0140-01

New Model Nomenclature (5th Digit = Application Rating)

R = Rating at +45°F to +130°F at 90°F Ambient Air

S = Rating at +20°F to +120°F at 90°F Ambient Air

F = Rating at -25°F to +105°F at 90° Ambient Air

- 1 Bank Unloading
- 2 Banks Unloading

6D, 6R and 6T – Semi-Hermetic Compressors

6D Delta Reed Models - Compressor Parts

Model (Horse Power Nomenclature)	New Model (BTU Nomenclature)	Delta Valve Plate Kit	Unloader Valve Plate Kit	Cylinder Head Gasket	Unloader Cylinder Head Gasket	Valve Plate Gasket	Terminal Plate Group
		(998-)	(998-)	(020-)	(020-)	(020-)	(521-)
• 6DM3A350E-FSU	6DM3R37ME-FSU	2661-27	2661-28	0600-00	0616-00	1235-07	0140-01
• 6DM3A350E-TSE	6DM3R37ME-TSE	2661-27	2661-28	0600-00	0616-00	1235-07	0140-01
• 6DM3A350E-TSN	6DM3R37ME-TSN	2661-27	2661-28	0600-00	0616-00	1235-07	0142-01
•• 6DN3A3500-FSD	6DN3R37M0-FSD	2661-27	2661-28	0600-00	0616-00	1235-07	0140-01
•• 6DN3A3500-FSU	6DN3R37M0-FSU	2661-27	2661-28	0600-00	0616-00	1235-07	0140-01
•• 6DN3A3500-TSE	6DN3R37M0-TSE	2661-27	2661-28	0600-00	0616-00	1235-07	0140-01
•• 6DN3A3500-TSN	6DN3R37M0-TSN	2661-27	2661-28	0600-00	0616-00	1235-07	0142-01
•• 6DN3A350E-FSD	6DN3R37ME-FSD	2661-27	2661-28	0600-00	0616-00	1235-07	0140-01
•• 6DN3A350E-FSU	6DN3R37ME-FSU	2661-27	2661-28	0600-00	0616-00	1235-07	0140-01
•• 6DN3A350E-TSE	6DN3R37ME-TSE	2661-27	2661-28	0600-00	0616-00	1235-07	0140-01
•• 6DN3A350E-TSN	6DN3R37ME-TSN	2661-27	2661-28	0600-00	0616-00	1235-07	0142-01
•• 6DP1A2000-TSK	N/A	2661-27	2661-28	0600-00	0616-00	1235-01	0142-00
•• 6DP1A3500-FSD	6DP1R35M0-FSD	2661-27	2661-28	0600-00	0616-00	1235-01	0140-01
•• 6DP1A3500-TSE	6DP1R35M0-TSE	2661-27	2661-28	0600-00	0616-00	1235-01	0140-01
•• 6DP1A3500-TSK	6DP1R35M0-TSK	2661-27	2661-28	0600-00	0616-00	1235-01	0141-01
•• 6DP1A350E-TSK	6DP1R35ME-TSK	2661-27	2661-28	0600-00	0616-00	1235-01	0141-01
•• 6DP3A200E-FSM	6DP3R23ME-FSM	2661-26	2661-28	0600-00	0616-00	1235-01	0140-00
•• 6DP3A200E-TSE	6DP3R23ME-TSE	2661-27	2661-28	0600-00	0616-00	1235-01	0140-00
•• 6DP3A200E-TSK	6DP3R23ME-TSK	2661-27	2661-28	0600-00	0616-00	1235-01	0142-00
•• 6DP3A3500-FSD	6DP3R35M0-FSD	2661-27	2661-28	0600-00	0616-00	1235-01	0140-01
•• 6DP3A3500-TSE	6DP3R35M0-TSE	2661-27	2661-28	0600-00	0616-00	1235-01	0140-01
•• 6DP3A3500-TSK	6DP3R35M0-TSK	2661-27	2661-28	0600-00	0616-00	1235-01	0142-01
•• 6DP3A350E-FSD	6DP3R35ME-FSD	2661-27	2661-28	0600-00	0616-00	1235-01	0140-01
•• 6DP3A350E-TSE	6DP3R35ME-TSE	2661-27	2661-28	0600-00	0616-00	1235-01	0140-01
•• 6DP3A350E-TSK	6DP3R35ME-TSK	2661-27	2661-28	0600-00	0616-00	1235-01	0142-01
• 6DR1A4000-FSD	6DR1R40M0-FSD	2661-27	2661-28	0600-00	0616-00	1235-03	0140-01
• 6DR1A4000-FSU	6DR1R40M0-FSU	2661-27	2661-28	0600-00	0616-00	1235-03	0140-01
• 6DR1A4000-TSE	6DR1R40M0-TSE	2661-27	2661-28	0600-00	0616-00	1235-03	0140-01
• 6DR1A4000-TSN	6DR1R40M0-TSN	2661-27	2661-28	0600-00	0616-00	1235-03	0142-01
• 6DR3A300E-TSE	6DR3R28ME-TSE	2661-27	2661-28	0600-00	0616-00	1235-03	0140-01
• 6DR3A300E-TSK	6DR3R28ME-TSK	2661-27	2661-28	0600-00	0616-00	1235-03	0142-01
• 6DR3A4000-FSD	6DR3R40M0-FSD	2661-27	2661-28	0600-00	0616-00	1235-03	0140-01
• 6DR3A4000-FSU	6DR3R40M0-FSU	2661-27	2661-28	0600-00	0616-00	1235-03	0140-01
• 6DR3A4000-TSE	6DR3R40M0-TSE	2661-27	2661-28	0600-00	0616-00	1235-03	0140-01
• 6DR3A4000-TSN	6DR3R40M0-TSN	2661-27	2661-28	0600-00	0616-00	1235-03	0142-01
• 6DR3A400E-FSD	6DR3R40ME-FSD	2661-27	2661-28	0600-00	0616-00	1235-03	0140-01

New Model Nomenclature (5th Digit = Application Rating)

R = Rating at +45°F to +130°F at 90°F Ambient Air

S = Rating at +20°F to +120°F at 90°F Ambient Air

F = Rating at -25°F to +105°F at 90° Ambient Air

- 1 Bank Unloading
- 2 Banks Unloading

Semi-Hermetic Compressors – 6D, 6R and 6T

6D Delta Reed Models - Compressor Parts

Model (Horse Power Nomenclature)	New Model (BTU Nomenclature)	Delta Valve Plate Kit	Unloader Valve Plate Kit	Cylinder Head Gasket	Unloader Cylinder Head Gasket	Valve Plate Gasket	Terminal Plate Group
		(998-)	(998-)	(020-)	(020-)	(020-)	(521-)
• 6DR3A400E-FSU	6DR3R40ME-FSU	2661-27	2661-28	0600-00	0616-00	1235-03	0140-01
• 6DR3A400E-TSE	6DR3R40ME-TSE	2661-27	2661-28	0600-00	0616-00	1235-03	0140-01
• 6DR3A400E-TSN	6DR3R40ME-TSN	2661-27	2661-28	0600-00	0616-00	1235-03	0142-01
•• 6DS1A4000-FSD	6DS1R40M0-FSD	2661-27	2661-28	0600-00	0616-00	1235-03	0140-01
•• 6DS1A4000-FSU	6DS1R40M0-FSU	2661-27	2661-28	0600-00	0616-00	1235-03	0140-01
•• 6DS1A4000-TSE	6DS1R40M0-TSE	2661-27	2661-28	0600-00	0616-00	1235-03	0140-01
•• 6DS1A4000-TSN	6DS1R40M0-TSN	2661-27	2661-28	0600-00	0616-00	1235-03	0142-01
•• 6DS3A300E-TSE	6DS3R28ME-TSE	2661-27	2661-28	0600-00	0616-00	1235-03	0140-00
•• 6DS3A300E-TSK	6DS3R28ME-TSK	2661-27	2661-28	0600-00	0616-00	1235-03	0142-00
•• 6DS3A4000-FSD	6DS3R40M0-FSD	2661-27	2661-28	0600-00	0616-00	1235-03	0140-01
•• 6DS3A4000-FSU	6DS3R40M0-FSU	2661-27	2661-28	0600-00	0616-00	1235-03	0140-01
•• 6DS3A4000-TSE	6DS3R40M0-TSE	2661-27	2661-28	0600-00	0616-00	1235-03	0140-01
•• 6DS3A4000-TSN	6DS3R40M0-TSN	2661-27	2661-28	0600-00	0616-00	1235-03	0142-01
•• 6DS3A400E-FSD	6DS3R40ME-FSD	2661-27	2661-28	0600-00	0616-00	1235-03	0140-01
•• 6DS3A400E-FSU	6DS3R40ME-FSU	2661-27	2661-28	0600-00	0616-00	1235-03	0140-01
•• 6DS3A400E-TSE	6DS3R40ME-TSE	2661-27	2661-28	0600-00	0616-00	1235-03	0140-01
•• 6DS3A400E-TSN	6DS3R40ME-TSN	2661-27	2661-28	0600-00	0616-00	1235-03	0140-01
6DT1A3000-FSD	6DT1F11M0-FSD	2661-26		0600-00		1235-03	0140-00
6DT1A3000-TSE	6DT1F11M0-TSE	2661-26		0600-00		1235-03	0140-00
6DT1A3000-TSK	6DT1F11M0-TSK	2661-26		0600-00		1235-03	0142-00
6DT3A3000-FSD	6DT3F11M0-FSD	2661-26		0600-00		1235-03	0140-00
6DT3A3000-TSE	6DT3F11M0-TSE	2661-26		0600-00		1235-03	0140-00
6DT3A3000-TSK	6DT3F11M0-TSK	2661-26		0600-00		1235-03	0142-00
6DT3A300E-FSD	6DT3F11ME-FSD	2661-26		0600-00		1235-03	0140-00
6DT3A300E-TSE	6DT3F11ME-TSE	2661-26		0600-00		1235-03	0140-00
6DT3A300E-TSK	6DT3F11ME-TSK	2661-26		0600-00		1235-03	0142-00
• 6DW3A3000-FSD	6DW3R32M0-FSD	2661-27	2661-28	0600-00	0616-00	1235-01	0140-01
• 6DW3A3000-TSE	6DW3R32M0-TSE	2661-27	2661-28	0600-00	0616-00	1235-01	0140-01
• 6DW3A3000-TSK	6DW3R32M0-TSK	2661-27	2661-28	0600-00	0616-00	1235-01	0142-01
• 6DW3A300E-FSD	6DW3R32ME-FSD	2661-27	2661-28	0600-00	0616-00	1235-01	0140-01
• 6DW3A300E-TSE	6DW3R32ME-TSE	2661-27	2661-28	0600-00	0616-00	1235-01	0140-01
• 6DW3A300E-TSK	6DW3R32ME-TSK	2661-27	2661-28	0600-00	0616-00	1235-01	0142-01
•• 6DY3A3000-FSD	6DY3R32M0-FSD	2661-27	2661-28	0600-00	0616-00	1235-01	0140-01
•• 6DY3A3000-TSE	6DY3R32M0-TSE	2661-27	2661-28	0600-00	0616-00	1235-01	0140-01
•• 6DY3A3000-TSK	6DY3R32M0-TSK	2661-27	2661-28	0600-00	0616-00	1235-01	0142-01
•• 6DY3A300E-FSD	6DY3R32ME-FSD	2661-27	2661-28	0600-00	0616-00	1235-01	0140-01

New Model Nomenclature (5th Digit = Application Rating)

R = Rating at +45°F to +130°F at 90°F Ambient Air

S = Rating at +20°F to +120°F at 90°F Ambient Air

F = Rating at -25°F to +105°F at 90° Ambient Air

- 1 Bank Unloading
- 2 Banks Unloading

6D, 6R and 6T – Semi-Hermetic Compressors

6D Delta Reed Models - Compressor Parts

Model (Horse Power Nomenclature)	New Model (BTU Nomenclature)	Delta Valve Plate Kit	Unloader Valve Plate Kit	Cylinder Head Gasket	Unloader Cylinder Head Gasket	Valve Plate Gasket	Terminal Plate Group
		(998-)	(998-)	(020-)	(020-)	(020-)	(521-)
•• 6DY3A300E-TSE	6DY3R32ME-TSE	2661-27	2661-28	0600-00	0616-00	1235-01	0140-01
•• 6DY3A300E-TSK	6DY3R32ME-TSK	2661-27	2661-28	0600-00	0616-00	1235-01	0142-01

New Model Nomenclature (5th Digit = Application Rating)

R = Rating at +45°F to +130°F at 90°F Ambient Air

S = Rating at +20°F to +120°F at 90°F Ambient Air

F = Rating at -25°F to +105°F at 90° Ambient Air

- 1 Bank Unloading
- 2 Banks Unloading

6D Compressor Capacity Control Kits

Standard Model	Blocked Suction Capacity Control Model (33% Single Bank)	Blocked Suction Capacity Control Model (66% Two Bank)	Capacity Control Conversion Kit with 24V Unloader	Capacity Control Conversion Kit with 120V Unloader	Capacity Control Conversion Kit with 240V Unloader
6DB3A300*	6DW3A300*	6DY3A300*	998-2119-31	998-2119-32	998-2119-33
6DG3A350*	6DM3A350*	6DN3A350*	998-2119-31	998-2119-32	998-2119-33
6DL3A270*	6DC3A270*	6DD3A270*	998-2119-35	998-2119-36	998-2119-37
6DH3A200*	6DK3A200*	6DP3A200*	998-2119-31	998-2119-32	998-2119-33
6DH3A350*	6DK3A350*	6DP3A350*	998-2119-31	998-2119-32	998-2119-33
6DT3A300*	6DE3A300*	6DF3A300*	998-2119-35	998-2119-36	998-2119-37
6DJ3A300*	6DR3A300*	6DS3A300*	998-2119-31	998-2119-32	998-2119-33
6DJ3A400*	6DR3A400*	6DS3A400*	998-2119-31	998-2119-32	998-2119-33
6DB3R32M*	6DW3R32M*	6DY3R32M*	998-2119-31	998-2119-32	998-2119-33
6DG3R37M*	6DM3R37M*	6DN3R37M*	998-2119-31	998-2119-32	998-2119-33
6DL3F93K*	6DC3F93K*	6DD3F93K*	998-2119-35	998-2119-36	998-2119-37
6DH3R23M*	6DK3R23M*	6DP3R23M*	998-2119-31	998-2119-32	998-2119-33
6DH3R35M*	6DK3R35M*	6DP3R35M*	998-2119-31	998-2119-32	998-2119-33
6DT3F11M*	6DE3F11M*	6DSNF11M*	998-2119-35	998-2119-36	998-2119-37
6DJ3R28M*	6DR3R28M*	6DS3R28M*	998-2119-31	998-2119-32	998-2119-33
6DJ3R40M*	6DR3R40M*	6DS3R40M*	998-2119-31	998-2119-32	998-2119-33

* = E (for POE oil models), 0 (for mineral oil models) or L (for less oil models)



Semi-Hermetic Compressors – 6D, 6R and 6T

6R - Compressor Parts

Model	Valve Plate Kit	Complete Gasket Set	Cylinder Head Gasket	Unloader Cylinder Head Gasket	Valve Plate Gasket	Terminal Plate Group
	(998-)	(998-)	(020-)	(020-)	(020-)	(521-)
6RA4-1000-ESL	0661-00	0669-00	0629-00		0626-00	0141-00
6RA4-1000-FSM	0661-00	0669-00	0629-00		0626-00	0140-00
6RA4-1000-TSE	0661-00	0669-00	0629-00		0626-00	0140-00
6RA4-1000-TSK	0661-00	0669-00	0629-00		0626-00	0142-00
6RA4-2000-FSD	0661-00	0669-00	0629-00		0626-00	0140-00
6RA4-2000-TSE	0661-00	0669-00	0629-00		0626-00	0140-00
6RA4-2000-TSK	0661-00	0669-00	0629-00		0626-00	0142-00
6RA4-3000-FSD	0661-52	0669-00	0629-00		0626-00	0140-00
6RA4-3000-TSE	0661-52	0669-00	0629-00		0626-00	0140-00
6RA4-3000-TSK	0661-52	0669-00	0629-00		0626-00	0142-00
6RA5-1000-TSK	0661-00	0669-00	0629-00		0626-00	0142-00
6RA5-2000-TSK	0661-00	0669-00	0629-00		0626-00	0142-00
6RB2-1000-FSM	0661-52	0669-00	0629-00	0630-00	0626-00	0140-00
6RB2-1000-TSK	0661-52	0669-00	0629-00	0630-00	0626-00	0142-00
6RB2-2000-FSD	0661-52	0669-00	0629-00	0630-00	0626-00	0140-00
6RB2-2000-TSE	0661-52	0669-00	0629-00	0630-00	0626-00	0140-00
6RB2-2000-TSK	0661-52	0669-00	0629-00	0630-00	0626-00	0142-00
6RB5-2000-TSK	0661-52	0669-00	0629-00	0630-00	0626-00	0142-00
• 6RE2-2000-FSD	0661-66	0669-00	0629-00		0626-00	0140-00
• 6RE2-2000-TSE	0661-66	0669-00	0629-00		0626-00	0140-00
• 6RE2-2000-TSK	0661-66	0669-00	0629-00		0626-00	0142-00
• 6RE2-3000-FSD	0661-52	0669-00	0629-00		0626-00	0140-00
• 6RE2-3000-TSE	0661-52	0669-00	0629-00		0626-00	0140-00
• 6RE2-3000-TSK	0661-52	0669-00	0629-00		0626-00	0140-00
6RF5-2000-FSD	0661-00	0669-00	0629-00		0626-00	0140-00
6RF5-2000-TSE	0661-00	0669-00	0629-00		0626-00	0140-00
6RH1-2000-TSE	0661-51	0669-54	0629-00		0627-00	0140-00
6RH1-2000-TSK	0661-51	0669-54	0629-00		0627-00	0142-00
6RH1-3500-FSD	0661-51	0669-54	0629-00		0627-00	0140-01
6RH1-3500-TSE	0661-51	0669-54	0629-00		0627-00	0140-01
6RH1-3500-TSK	0661-51	0669-54	0629-00		0627-00	0142-01
6RH5-2000-TSK	0661-51	0669-54	0629-00		0627-00	0142-01
6RH5-3500-TSE	0661-51	0669-54	0629-00		0627-00	0140-01
6RJ1-3000-FSD	0661-60	0669-55	0629-00		0628-01	0140-00
6RJ1-4000-FSD	0661-60	0669-55	0629-00		0628-01	0140-01
6RJ1-4000-FSU	0661-60	0669-55	0629-00		0628-01	0140-01
6RJ1-4000-TSE	0661-60	0669-55	0629-00		0628-01	0140-01
6RJ1-4000-TSN	0661-60	0669-55	0629-00		0628-01	0142-01

- 1 Bank Unloading
- 2 Banks Unloading